

Mitsubishi Programmable Controllers

MELSEC-AnS/QnAS series



The Answer to Optimum Control -

Anytime, Anywhere!



Choose a programmable controller. Choose quality. Choose MELSEC-AnS/QnAS!

Need reliability? Choose the MELSEC-AnS/QnAS Series!

Need Mitsubishi's collective strength? Choose the MELSEC-AnS/QnAS Series!

Need global support? Choose the MELSEC-AnS/QnAS Series!


I N D E X

Network system	4
Software	6
Special function modules	8
General specifications	13
CPU modules	14
World wide support	16
Product list	17




Mitsubishi FA Network System

The Mitsubishi FA Network System provides optimum network products to meet specific application requirements. The network system includes an enterprise level network (Ethernet) used to gather information on production/quality control and the equipment operating status, a control level network (MELSECNET/10) used to link controllers, and a device level network (CC-Link) used to link a controller and other devices including sensors. This seamless network system allows easy information access beyond network levels.

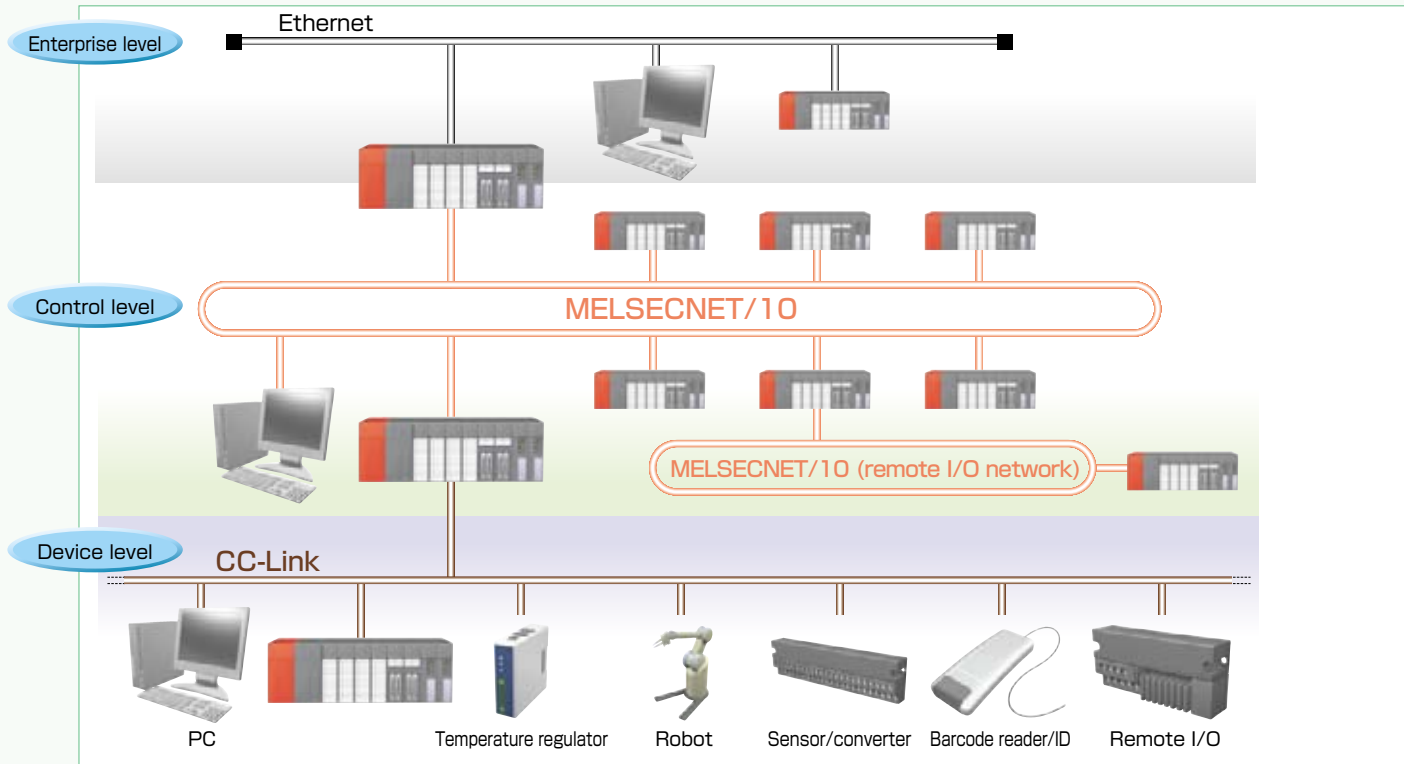


MELSECNET/10

Large-scale system configuration

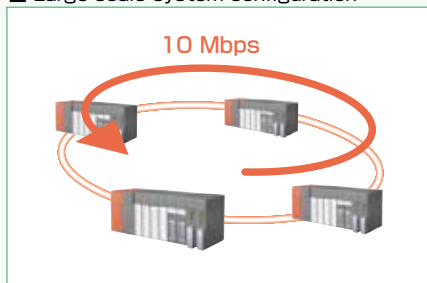

- High-speed communication**
High-speed communication of 10 Mbps is possible using a dedicated data-link processor (MDP).
- No. of connectable stations**
A maximum of 64 stations (optical/coaxial loop system)/32 stations (coaxial bus system) can be connected. The entire system can be expanded up to 255 networks (239 for QnAS Series).
- Large capacity**
The maximum number of link points per network for link relay B, link register W, and link I/O is 8192, respectively. Hence, the network can support even large-scale systems with many I/O devices.

Diverse transmission configuration

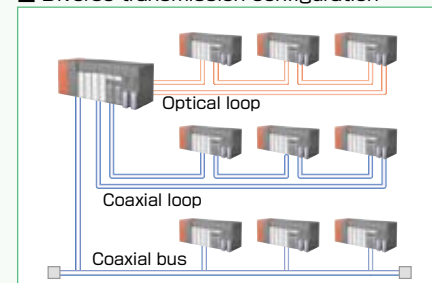

To support a variety of systems flexibly, three transmission configurations are offered: an optical loop system which provides long distance between stations, long overall distance, and high noise immunity; a coaxial bus system which realizes low cost and easy cable assembly; and a coaxial loop system.


N:N communication

Access, such as remote monitoring and uploading/downloading programs from peripheral devices, PCs, etc., is capable in N:N communication. Furthermore, N:N communication can be performed by transmission/reception instructions (ZNRD, ZNWR) from the programmable controller program. In addition to this feature, the QnACPU can execute SEND, RECV, READ, WRITE, and REQ message transmission/reception instructions.

Gateway function


The gateway function to multiple networks via the QnACPU and AnUCPU enables interlink data transfer of link devices and a routing function that performs N:N communication with other networks.

Highly reliable network

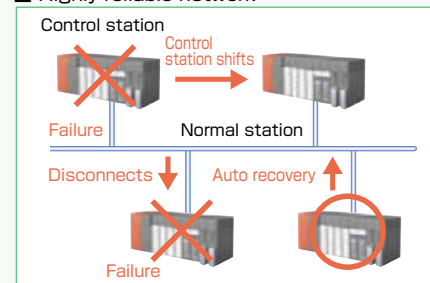

Even if the control station fails, the normal station acts as a sub-control station to prevent interruptions in network communication.

Incorporating generic PC into the network

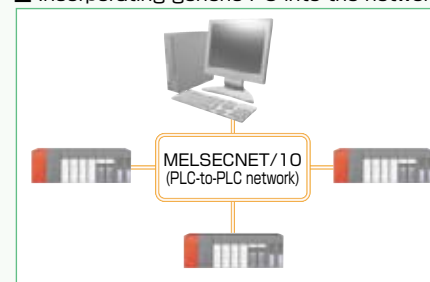

By installing MELSECNET/10 boards in generic PCs, the PCs can be connected to the MELSECNET/10 network system. This allows you to check data-link related testing and monitoring information on the PC screen and to access programmable controller data using user-programmed functions with the software.


MELSECNET/10 Specifications

Type	Control/normal station	A1SJ71QLP21 ^{QnAS} A1SJ71LP21 ^{AnS}	A1SJ71QLR21 ^{QnAS} A1SJ71LR21 ^{AnS}	A1SJ71QBR11 ^{QnAS} A1SJ71BR11 ^{AnS}
Item	Remote I/O station	A1SJ72QLP25		A1SJ72QBR15
Transmission path		Optical loop (SI/QSI cable)	Coaxial loop	Coaxial bus
Communication speed		10 Mbps/20 Mbps (multiplex transmission)		
Overall distance		30 km	19.2 km/30 km ^{*1}	300 m/500 m ^{*1}
Max. distance between stations		500 m/1 km ^{*1}	300 m/500 m ^{*1}	
Max. link points per network		X/Y: 8192 points, B: 8192 points, W: 8192 points		
No. of connectable stations per network		64 (PLC-to-PLC network)/65 (remote I/O network)		32 (PLC-to-PLC network)/33 (remote I/O network)

*1: Varies depending on the type of cable used.


CC-Link

Minimum wiring, low cost

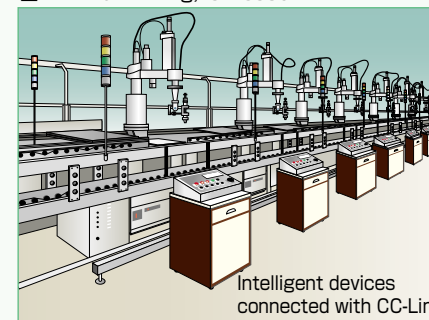


A bus type connection using dedicated CC-Link cables enables to connect multiple intelligent devices spread throughout the production line and to modify wiring easily. Hence, wiring and system maintenance costs are reduced.

Reliable and safe system

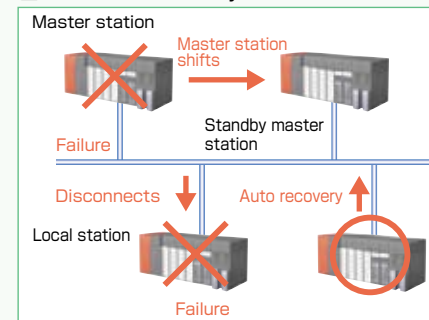


A wide selection of products

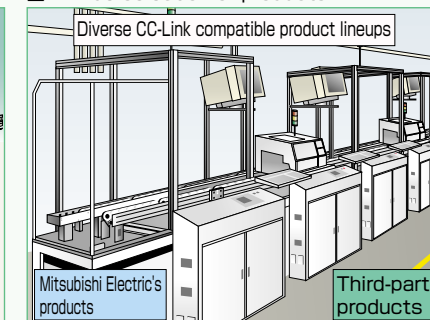

Optimal products can be selected from a wide variety of Mitsubishi Electric's products and third-party products for the CC-Link system. Mitsubishi Electric performs compatibility tests to ensure that the third-party products can be connected without any problems.

Communication are continued between the master station and other local stations even if the local or remote station fails. In addition, repair and replacement can be done without stopping the system (when a 2-piece terminal block is used).

Large-scale, multi-function system

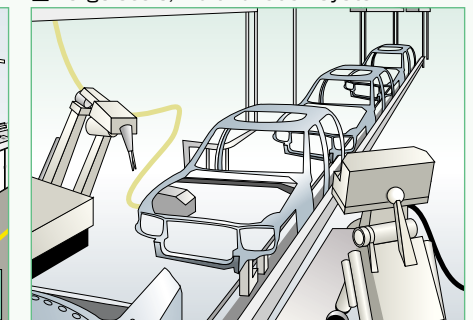

- High-speed communication**
Communication with a transmission speed of 10 Mbps is possible.
- Long-distance communication**
Maximum 1.2 km long-distance communication is supported. Furthermore, the distance can be extended up to 7.8 km using an optical repeater module.
- Large capacity**
Communication of I/O data (2048 points) and numerical data (512 points) is capable. Hence, large-scale systems with many I/O devices can be supported.

CC-Link Specifications

Item	A1SJ61QBT11 ^{QnAS}	A1SJ61BT11 ^{AnS}
Transmission speed	Can select from 156 kbps, 625 kbps, 2.5 Mbps, 5 Mbps, and 10 Mbps	
Max. no. of connectable modules (master station)	64 (for remote I/O station with 1 occupied station)	
No. of occupied stations (local station)	1 to 4	
No. of link points	Per system	Remote I/O: 2048 points Remote register: 256 points (master station to remote/local station), 256 points (remote/local station to master station)
	Per remote/local station	Remote I/O: 32 points (local station: 30 points) Remote register: 4 points (master station to remote/local station), 4 points (remote/local station to master station)
Transmission path	Bus (RS-485)	


* The maximum overall cable length will differ depending on the transmission speed and connection cable. When a Ver.1.10 compatible cable is used, the relationship between transmission speed and the maximum overall cable length is shown in the table on the right.

Transmission speed	Station-to-station cable length	Maximum overall cable length
156 kbps	20 cm or longer	1200 m
625 kbps		900 m
2.5 Mbps		400 m
5 Mbps		160 m
10 Mbps		100 m

●Integrated FA Development and Debugging with MELSOFT


MELSOFT, Mitsubishi Electric's integrated FA software, dramatically improves operating efficiency for program development, debugging, and maintenance by taking advantage of Windows operability. More convenient and easy-to-use engineering environment is provided by the software such as GX Simulator that enables offline debugging without needing actual hardware and GX Configurator that allows initialization on the screen (without a program), monitoring, testing, etc.

●Improving Development Efficiency with GX Series

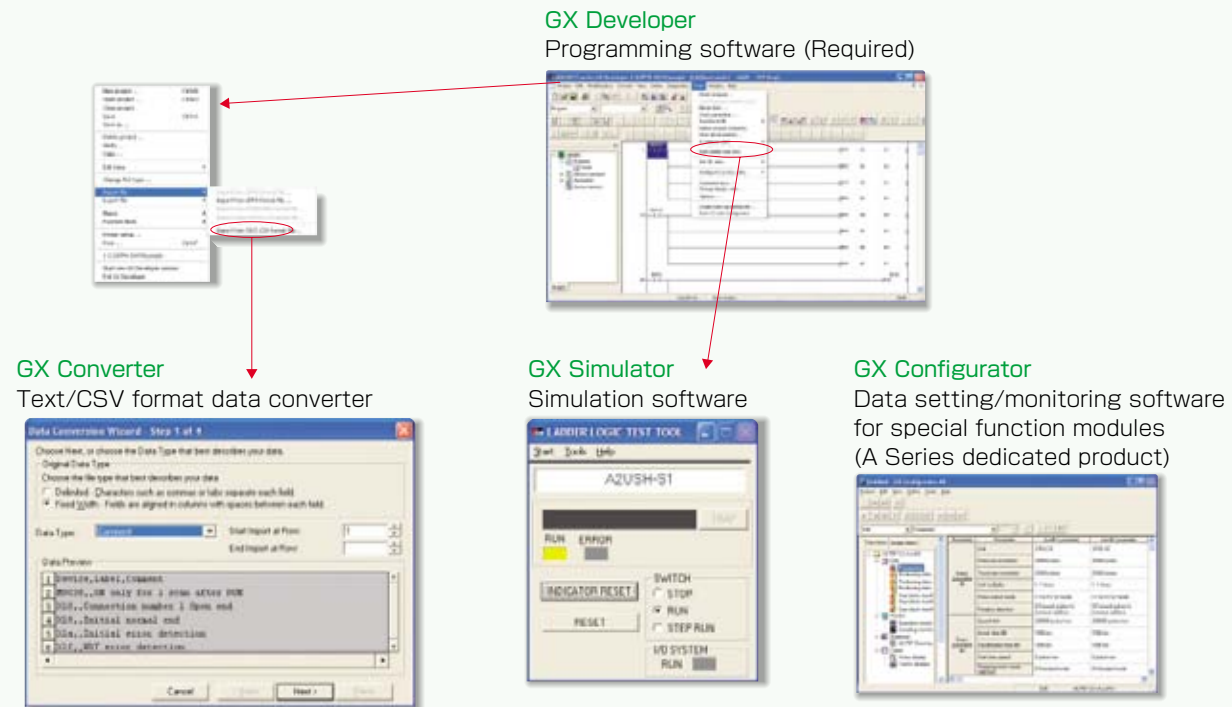


●Offline Debugging

GX Simulator runs a virtual programmable controller on the PC. Program debugging can be performed on the PC without needing actual hardware. By duplicating the operation of the actual programmable controller, debugging can be carried out upon completion of designing without having to wire I/O modules.

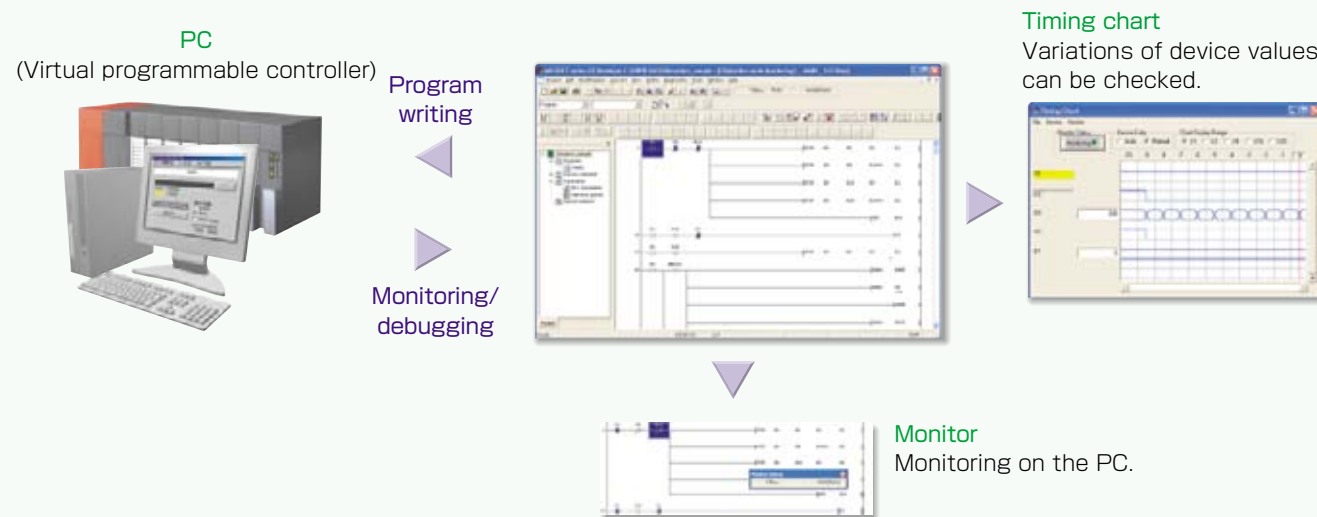

●Support Creation of System Documents

GX Converter converts other format data (text format data, CSV format data) to GX Developer format data (instruction list, device comment). Data conversion is simple using the data conversion wizard. This is a convenient tool for creation of system documents.

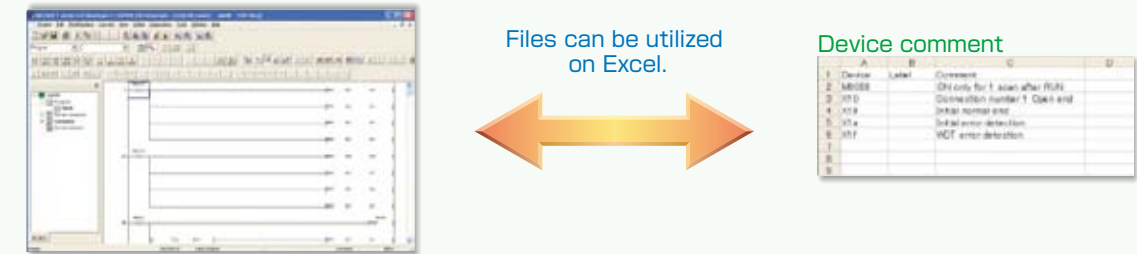

●Easy Parameter Settings


GX Configurator initializes parameters for special function modules simply by following the screen without sequence programs. Furthermore, monitoring and testing can be performed on the screen without having to consider the buffer memory. This is an effective tool for system adjustments and troubleshooting.

GX Configurator-AP: Positioning module setting/monitoring tool




Image menu screen

GX Configurator-CC: CC-Link module setting/monitoring tool

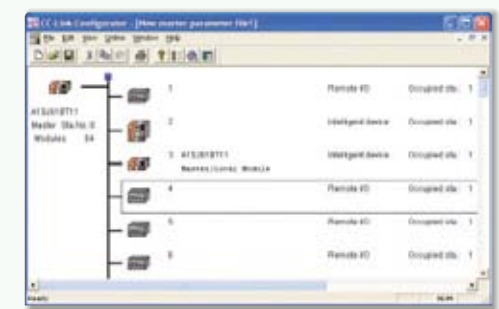

Master parameter setting screen

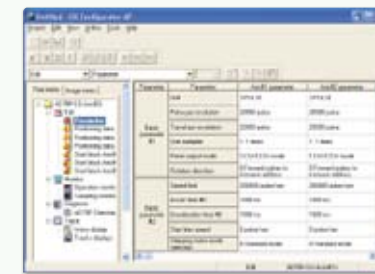


Tree menu screen




Remote parameter setting screen

●MX Series Designed to Link Office to Shop Floor

MX Component of the MX Series supports a variety of communication methods from PCs to programmable controllers. Its ActiveX[®] based library achieves communication with only a simple process without having to consider protocol communication issues. MX Components is suitable for the sites where a diverse application requirements needs to be met and speed is required in system configuration and modifications. MX Component drastically reduces communication program development time and improves efficiency. Additionally, MX Components supports a variety of development languages, such as Visual Basic[®], Visual C++[®], Excel/Access VBA, and VBScript, enabling a broad range of application developments.

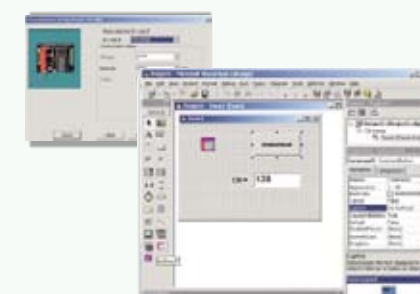

MX Component

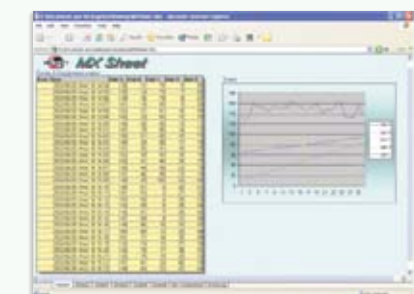


MX Sheet

● Positioning Module QnAS For QnASCPU AnS For AnSCPU


Positioning modules are connected to servo amplifiers and servo motors, and controls (calculates and instructs) positioning of a target object at a preset position or speed. Using with GX Configurator-AP (positioning module setting/monitoring tool for A1SD75P), setting the positioning parameters and data and monitoring are easier.

Application example: Filling device line
Move bottles to the filling nozzle position and control the nozzle position and filling speed to prevent from forming bubbles.



Bottle movement: Fixed-feed rate
Nozzle up/down: Position control
Fluid filling: Speed control

Application example: Semiconductor related equipment
Control accurate positioning (X/Y axes) to inspect a wafer prober and tester for each chip on the wafer.



Prober movement: 2-axis (X/Y) linear interpolation control


● SSCNET Connection Type

- Connectable to Mitsubishi SSCNET servo amplifiers up to 30 m with minimum wiring.
- An absolute position system that does not require original point recovery of machine can be constructed easily.
- Equipped with a variety of control methods, such as PTP (Point to Point) control, fixed-feed rate control, and 2-axis linear/circular interpolation control.
- Transmitting parameters to the servo amplifiers and monitoring are capable from the positioning modules.

Item	A1SD75M1 <small>QnAS AnS</small>	A1SD75M2 <small>QnAS AnS</small>	A1SD75M3 <small>QnAS AnS</small>
No. of control axes	1 axis	2 axes	3 axes
Control unit	mm, inch, degree, pulse		
Positioning range*1	-2147483648 to 2147483647 pulse (Can be set in mm, inches, or degrees.)		
Speed command	1 to 1000000 pulse/s (Can be set in mm/min, inch/min, or degree/min.)		
Control method	PTP control, path control (linear and circular), speed control, speed/position changeover control		
Max. output command speed	1 Mpps		
Interpolation function	-	2-axis linear interpolation, 2-axis circular interpolation	

*1: The positioning range is applicable when an absolute position system is not used.

SSCNET connection example

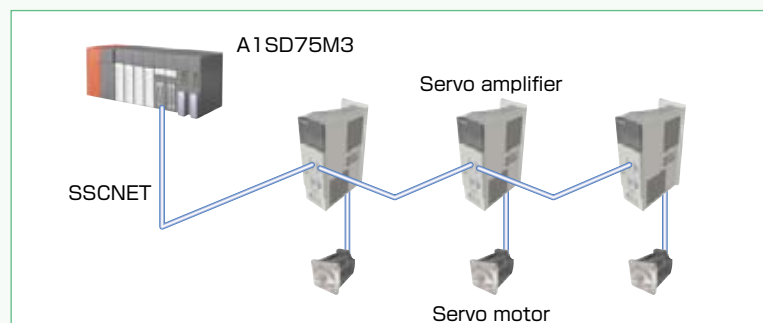

● Open Collector/Differential Driver Output Type

- Open collector/differential driver output type for standard servo amplifiers.
- Being compatible with stepping motors, systems can be constructed depending on application requirements.
- Equipped with a variety of control methods, such as PTP (Point to Point) control, fixed-feed rate control, and 2-axis linear/circular interpolation control.

Item	A1SD75P1-S3 <small>QnAS AnS</small>	A1SD75P2-S3 <small>QnAS AnS</small>	A1SD75P3-S3 <small>QnAS AnS</small>
No. of control axes	1 axis	2 axes	3 axes
Control unit	mm, inch, degree, pulse		
Positioning range*1	-2147483648 to 2147483647 pulse (Can be set in mm, inches, or degrees.)		
Speed command	1 to 1000000 pulse/s (Can be set in mm/min, inch/min, or degree/min.)		
Control method	PTP control, path control (linear and circular), speed control, speed/position changeover control		
Max. output pulse	Differential driver: 400 kpps, open collector: 200 kpps		
Interpolation function	-	2-axis linear interpolation, 2-axis circular interpolation	

*1: The positioning range is applicable in the standard mode.

● Analog Input Module QnAS For QnASCPU AnS For AnSCPU

The analog input modules convert input analog values (voltage or current) to digital values.
· The most suitable type can be selected based on the number of channels, analog input characteristics, resolution, etc.

Item	A1S64AD <small>QnAS AnS</small>	A1S68AD <small>QnAS AnS</small>
Analog input range	-10 to 10 V DC	
Voltage	Current	0 to 20 mA DC
	Voltage	5/2.5/1.25/1 mV
Resolution	Current	5/4 μA
	Voltage	2.5/1.25/0.83 mV
No. of channels	4	8
Conversion speed	20 ms/channel	0.5 ms/channel

● Analog Output Module QnAS For QnASCPU AnS For AnSCPU


The analog output modules convert the set digital values to analog values (voltage or current) and then output them externally.
· The most suitable type can be selected based on the number of channels, analog output characteristics, resolution, etc.

Item	A1S62DA <small>QnAS AnS</small>	A1S68DAV <small>QnAS AnS</small>	A1S68DAI <small>QnAS AnS</small>
Analog output range	-10 to 10 V DC		
Voltage	Current	—	4 to 20 mA DC
	Voltage	5 mV	—
Resolution	Current	—	4 μA
	Voltage	2.5/1.25/0.83 mV	—
No. of channels	2	8	
Conversion speed	25 ms/2 channels	4 ms/8 channels	

● Temperature Control Module QnAS For QnASCPU AnS For AnSCPU

The temperature control modules input temperature data of a controlled object from a temperature sensor and maintain temperature at the set value.

- By connecting a thermocouple or platinum RTD directly, an optimum temperature control (PID control) is available.
- Can control heating-cooling up to two loops.
- Can control temperature up to four loops.
- A1S64TCTRTBW can detect heater disconnection.

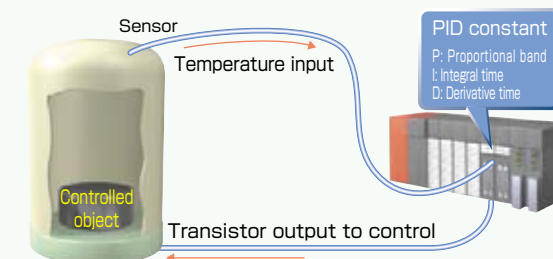

Item	A1S64TCTRT <small>QnAS AnS</small>	A1S64TCTRTBW <small>QnAS AnS</small>
Control output	Standard control (heating or cooling control), heating-cooling control	
No. of temperature input points	Standard control : 4 channels/module, heating-cooling control : 2 channels/module	
Supported sensors	Thermocouple (R, K, J, T, S, B, E, N, U, L, PLII, W5Re/W26Re), Platinum RTD (Pt100, JPt100)	
Sampling cycle	Standard control : 0.5 s/4 channels, heating-cooling control : 0.5 s/ 2 channels	
Disconnection detection	No	Yes


● Temperature Input Module QnAS For QnASCPU AnS For AnSCPU

The temperature input modules input temperature data from a temperature sensor and convert the value into the digital value.
· The most suitable type can be selected based on the measurement temperature, number of channels, resolution, etc.

Item	A1S68TD <small>QnAS AnS</small>	A1S62RD3N <small>QnAS AnS</small>	A1S62RD4N <small>QnAS AnS</small>
Supported sensors	Thermocouple (R, K, J, T, S, B, E)	Pt100, JPt100 (3-wire type)	Pt100, JPt100 (4-wire type)
No. of channels	8	2	
Temperature input range	0 to 1700°C	-180 to 600°C	
Resolution	B, R, S : 0.3°C K, E, J, T : 0.1°C	0.025°C	
Conversion speed	400 ms/8 channels	40 ms/channel	

● Ethernet Interface Module QnAS For QnASCPU AnS For AnSCPU


- Communication between the PC and programmable controller or between programmable controllers can be performed via Ethernet.
- The communication program for the PC can be simplified using MELSEC communication support tools (MX Component etc.). The module can be selected based on the interface (10BASE5, 10BASE-T, or 10BASE2).

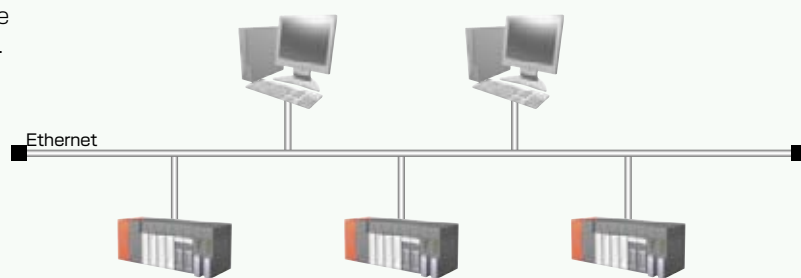

Item	A1SJ71QE71N3-T QnAS A1SJ71E71N3-T AnS
Interface	10BASE-T
Data transmission speed	10 Mbps
Max. distance between nodes	—
Max. segment length	100 m (between hub and node)
Max. no. of nodes/connection	Max. 4 stages cascade connection
No. of simultaneously open connections allowed	8

● Serial Communication Module QnAS For QnASCPU

An RS-232 or RS-422/RS-485 interface is used to perform data exchange between external devices (PCs, printers, display devices, sensors, measurement devices, etc.) and the programmable controller CPU. The communication program for the PC can be simplified using MELSEC communication support tools (MX Component etc.).

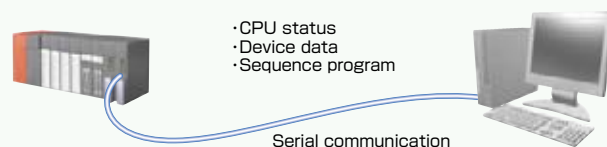

- Have two channels of RS-232 or one RS-232 and one RS-422/485, allowing to set each channel differently.
- Registration of the communication frame and ASCII/BIN code conversion are available based on the external device.
- Compatible with computer link modules and can be incorporated into a multidrop link.

Item	A1SJ71QC24N1 QnAS	A1SJ71QC24N1-R2 QnAS
Interface	RS-232×1 channel, RS-422/485×1 channel	RS-232×2 channels
Transmission speed	300 to 115200 bps	
Synchronization method	Asynchronous method	
Protocol	Dedicated, nonprocedural, bidirectional	
Compatibility	Compatible with A1SJ71UC24-R2/PRF/R4 communication protocols	
Modem support function	Yes	

● Computer Link Module AnS For AnSCPU

An RS-232 or RS-422/RS-485 interface is used to perform data exchange between external devices (PCs, printers, etc.) and the programmable controller CPU. The communication program for the PC can be simplified using MELSEC communication support tools (MX Component etc.).

(Support dedicated, nonprocedural, and bidirectional protocols. Communication based on the application or external device is capable.)

- Monitoring the status of programmable controller CPU and uploading/downloading device data and programs are possible.

Item	A1SJ71UC24-R4 AnS	A1SJ71UC24-R2 AnS	A1SJ71UC24-PRF AnS
Interface	RS422/485×1 channel	RS-232×1 channel	
Transmission speed	300 to 19200 bps		
Synchronization method	Asynchronous method		
Protocol	Dedicated, nonprocedural, bidirectional		
Multidrop link function	Yes	No	

● Interrupt Module QnAS For QnASCPU AnS For AnSCPU

When an interrupt input occurs, the interrupt module makes programmable controller CPU execute the specified interrupt programs.

Item	A1SI61 QnAS AnS	
No. of interrupt input points	16 points	
Rated input	Voltage	12/24 V DC
	Current	4 mA(12 V DC)/8 mA(24 V DC)
Response time	0.2 ms	

● High Speed Counter Module QnAS For QnASCPU AnS For AnSCPU

This module counts externally input pulse signals, compares the value with the preset value, and outputs a signal.

- Support low speed input pulses by counting speed switching pin. (A1SD61, A1SD62, A1SD62E, A1SD62D, A1SD62D-S1)
- External output by the comparison results (<, =, >) is available. (A1SD61)

Item	A1SD61 QnAS AnS	A1SD62 QnAS AnS	A1SD62E QnAS AnS	A1SD62D QnAS AnS	A1SD62D-S1 QnAS AnS
No. of channels	1	2			
Input method	Photocoupler (5/12/24 V DC; 2 to 5 mA)			Differential line receiver	
Input format	1-phase, 2-phase				
Max. counting speed	50 kpps	100 kpps		200 kpps	
No. of external output points	8 (comparison output)	2/channel (coincidence output)			1/channel (coincidence output)
External output method (transistor output 12/24 V DC)	Open collector	Sink type	Source type	Sink type	

● Position Detection Module QnAS For QnASCPU AnS For AnSCPU

The position of the target object is detected with a signal input from the absolute encoder.

Item	A1S62LS QnAS AnS	
Position detection method	Absolute position detection by absolute encoder	
Resolution	4096 divisions × 32 rotations to 409.6 divisions × 320 rotations	
Output	Limit switch output	

● Analog I/O Module QnAS For QnASCPU AnS For AnSCPU

Analog-digital conversion (A/D conversion) and digital-analog conversion (D/A conversion) can be performed with a single module.

Item	A1S66ADA QnAS AnS		A1S63ADA QnAS AnS	
	(A/D conversion)	(D/A conversion)	(A/D conversion)	(D/A conversion)
Analog I/O	Voltage	-10 to 10 V DC		
	Current	0 to 20 mA DC	-20 to 20 mA DC	0 to 20 mA DC
Resolution	Voltage	5/2.5/1.25/1 mV		
	Current	5/4 μA	10/5/3.33 μA	5/2.5/1.7 μA
No. of channels	4	2	2	1
Conversion speed	400 μs/4 channels	240 μs/2 channels	1ms/channel (at 1/4000) 2ms/channel (at 1/8000) 3ms/channel (at 1/12000)	

General Specifications

AS-i Master Module QnAS For QnASCPU AnS For AnSCPU

This is an AS-Interface Specification Version 2.04 compatible master module.

- Has two interfaces for AS-i system and can control 31 slave modules per system.
- The overall distance is 100 m. However, this can be extended to a maximum of 300 m with two repeaters.
- Supports automatic slave address assignment function (Automatic address assignment function).

Item	A1S71AS92 QnAS AnS
Max. no. of slaves	62 (31 × 2 systems)
Max. no. of I/O points	Input: 248 points, output: 248 points
Refresh time	5 ms
Communication speed	167 kbps
Transmission distance	Max. 100 m/system (up to 300 m possible with 2 repeaters)

General specifications indicate the environmental specifications in which this product can be installed and operated. Unless otherwise specified, the general specifications apply to all products of the AnS/QnAS Series.

Item	Specifications				
Operating ambient temperature	0 to 55°C				
Storage ambient temperature	-20 to 75°C				
Operating ambient humidity	10 to 90%RH, non-condensing				
Storage ambient humidity	10 to 90%RH, non-condensing				
Vibration resistance	Conforming to JIS B 3502, IEC 61131-2	Under intermittent vibration			Sweep count 10 times each in X, Y, Z directions (for 80 minutes)
		Frequency	Acceleration	Amplitude	
		10 to 57 Hz	—	0.075 mm	
		57 to 150 Hz	9.8 m/s ²	—	
		Under continuous vibration			
		Frequency	Acceleration	Amplitude	
10 to 57 Hz	—	0.035 mm			
57 to 150 Hz	4.9m/s ²	—			
Shock resistance	Conforming to JIS B 3502, IEC 61131-2 (147 m/s ² , 3 times each in X, Y, Z directions)				
Operating atmosphere	No corrosive gases				
Operating altitude	2000 m or less				
Installation location	Inside control panel				
Overvoltage category *1	II or less				
Pollution degree *2	2 or less				

*1: This indicates the section of the power supply to which the equipment is assumed to be connected between the public electrical power distribution network and the machinery within premises. Category II applies to equipment for which electrical power is supplied from fixed facilities. The surge voltage withstand level for up to the rated voltage of 300 V is 2500 V.

*2: This index indicates the degree to which conductive material is generated in the environment where the equipment is used. In pollution degree 2, only non-conductive pollution occurs. Temporary conductivity caused by condensation is to be expected.

(Notes)

(1) Noise immunity, withstand voltage, and insulation resistance will differ depending on the module. Please refer to the specifications of each module for details.

(2) Please consult your local Mitsubishi representative when using the device in a location susceptible to direct vibrations or impact.

● CPU Performance Specifications QnAS

Item	Q2ASHCPU-S1	Q2ASHCPU	Q2ASCPU-S1	Q2ASCPU
Programming language	Ladder/List/SFC			
I/O control mode	Refresh			
No. of I/O device points	8192 points			
No. of I/O points	1024 points	512 points	1024 points	512 points
Built-in RAM capacity	240 KB	112 KB	240 KB	112 KB
Program capacity	60 k steps	28 k steps	60 k steps	28 k steps
PC MIX value *2	3.8 instructions		1.3 instructions	
Data memory	Bit devices	Internal relay (M) *1	8192 points	
		Latch relay (L) *1	8192 points	
		Step relay (S)	8192 points (exclusively for SFC)	
		Annunciator (F) *1	2048 points	
		Edge relay (V) *1	2048 points	
		Link relay (B) *1	8192 points	
	Word devices	Timer (T) *1	2048 points (both high and low speed) Low/high-speed switching is set by instructions. Low/high-speed measurement unit is set by parameters.	
		Retentive timer (ST) *1	0 points (max. 2048 points)	
		Counter (C) *1	Counter: 1024 points Interrupt counter: 0 points (max. 48 points)	
		Data register (D) *1	12288 points	
Link register (W) *1	8192 points			
File register *1	Max. 1018 k words (when using memory card)			
Accumulator (A)	No			
Pointer (P)	4096 points			
Interrupt pointer (I)	48 points			
Index register (V, Z)	16 points			
	(Z only. V is used as an edge relay.)			
Master control nesting (N)	15 points			
Data type	Integer type (16 bits), precision integer type (32 bits), single precision floating-point type (32 bits)			
Function	Floating-point calculation, fixed-point BCD calculation, text string processing, trigonometric function, square root, exponential operation, natural logarithm			
Start at power on and at power restoration	Auto restart when "RUN" switch is ON.			
Constant scan	Yes			
Latch (Power failure compensation)	Yes			
Remote RUN, STOP	Yes			
PAUSE	Yes			
Status latch	Yes			
Sampling trace	Yes			
Offline switch	No			
Step operation	Yes			
Clock	Yes			
Online I/O module change (hot-swap)	No			
Interrupt processing	Yes			
Comment	Yes			
Watch dog timer	Variable			
Microcomputer program area	No			
Self-diagnostic function	Yes			

*1: Indicates the number of points in the default state. This can be changed by the parameters.

*2: The PC MIX value is the average number of instructions, such as basic instructions or data processing instructions executed in 1 μ s. The processing speed will rise as the value increases.

● CPU Performance Specifications AnS

Item	A2USHCPU-S1	A2USCPU	A2SHCPU	A1SJHCPU A1SHCPU	
Programming language	Ladder/List/SFC				
I/O control mode	Refresh		Refresh/ direct switching		
No. of I/O device points	8192 points		2048 points		
No. of I/O points	1024 points	512 points		256 points	
Built-in RAM capacity	256 KB	64 KB			
Program capacity	30 k steps	14 k steps		8 k steps	
PC MIX value *2	2.0 instructions	0.9 instructions	0.5 instructions	0.4 instructions	
Data memory	Bit devices	Internal relay (M) *1	Total 8192 points		
		Latch relay (L) *1	Total 2048 points		
		Step relay (S)			
		Annunciator (F) *1	2048 points		
		Edge relay (V) *1	No		
		Link relay (B) *1	8192 points		
	Word devices	Timer (T) *1	100 ms timer: 200 points 10 ms timer: 56 points 100 ms retentive timer: 0 points (total of up to 2048 points when using extension timer)		
		Retentive timer (ST) *1			
		Counter (C) *1	Counter: 1024 points Interrupt counter: 0 points (max. 32 points)	Counter: 256 points Interrupt counter: 0 points (max. 256 points)	
		Data register (D) *1	8192 points		
Link register (W) *1	8192 points		1024 points		
File register *1			1024 points		
Accumulator (A)	2 points (16 bits/point)				
Pointer (P)	256 points				
Interrupt pointer (I)	32 points				
Index register (V, Z)	14 points (16 bits/point)		2 points (16 bits/point)		
Master control nesting (N)	8 points				
Data type	Integer type (16 bits), precision integer type (32 bits), single precision floating-point type (32 bits)				
Function	Floating-point calculation, fixed-point BCD calculation, text string processing, trigonometric function, square root, exponential operation, natural logarithm		No		
Start at power on and at power restoration	Auto restart when "RUN" switch is ON.				
Constant scan	Yes				
Latch (Power failure compensation)	Yes				
Remote RUN, STOP	Yes				
PAUSE	Yes				
Status latch	Yes				
Sampling trace	Yes				
Offline switch	No			Yes	
Step operation	Yes			No	
Clock	Yes				
Online I/O module change (hot-swap)	No				
Interrupt processing	Yes				
Comment	Yes				
Watch dog timer	200 ms (fixed)		Variable		
Microcomputer program area	Exclusively for SFC		For users, packages, SFC		
Self-diagnostic function	Yes				

*1: Indicates the number of points in the default state. This can be changed by the parameters.

*2: The PC MIX value is the average number of instructions such as basic instructions or data processing instructions executed in 1 μ s. The processing speed will rise as the value increases.


Ensuring an extensive global support network meeting diverse support for today's needs

Complying with international quality assurance standards.

All of Mitsubishi Electric's FA component products have acquired the international quality assurance "ISO9001" and environment management system standard "ISO14001" certification. Mitsubishi's products also comply with various safety standards, including UL Standards, and shipping standards.



Compatible Standards

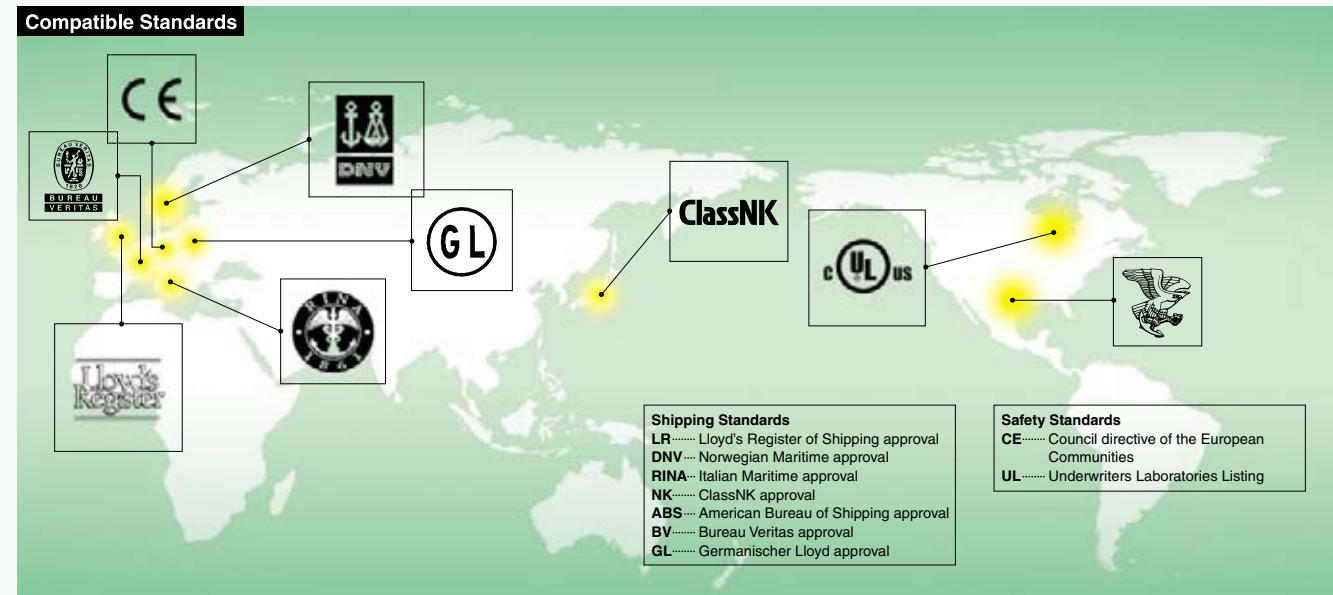

Global FA centers

"Mitsubishi Global FA Centers" are located throughout North America, Europe, and Asia to develop products complying with international standards and to provide attentive services.

North American FA Center

Mitsubishi Electric Automation, Inc.
 500 Corporate Woods Parkway, Vernon Hills, IL 60061, U.S.A
 Tel: +1-847-478-2100 / Fax: +1-847-478-2253
 Area covered: North America, Mexico, Chile, Brazil

Brazil FA Center

MELCO-TEC Representacao Comercial e Assessoria Tecnica Ltda.
 Av. Paulista, 1439, Cerqueira Cesar-Sao Paulo Brazil- CEP 01311-200
 Tel: +55-11-3146-2200 / Fax: +55-11-3146-2217
 Area covered: Brazil

European FA Center

Mitsubishi Electric Europe B.V. Polish Branch
 ul. Krakowska 50, 32-083 Balice, Poland
 Tel: +48-12-630-4700 / Fax: +48-12-630-4701
 Area covered: Central and Eastern Europe

German FA Center

Mitsubishi Electric Europe B.V. -German Branch
 Gothaer Strasse 8, D-40880 Ratingen, Germany
 Tel: +49-2102-486-0 / Fax: +49-2102-486-1120
 Area covered: Mainly Western Europe

UK FA Center

Mitsubishi Electric Europe B.V. UK Branch
 Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, UK.
 Tel: +44-1707-27-6100 / Fax: +44-1707-27-8695
 Area covered: UK, Ireland

Czech republic FA Center

Mitsubishi Electric Europe B.V. -o.s. Czech office
 Avenir Business Park, Radicka 714/113a, 158 00 Praha5, Czech Republic
 Tel: +420-251-551-470 / Fax: +420-251-551-471
 Area covered: Czech, Slovakia

Russian FA Center

Mitsubishi Electric Europe B.V. Russian Branch St.Petersburg office
 Sverdlovskaya emb., bld "Sch", BC "Benua", office 720; 195027, St.Petersburg, Russia
 Tel: +7-812-633-3497 / Fax: +7-812-633-3499
 Area covered: Russia

Korean FA Center

Mitsubishi Electric Automation Korea Co., Ltd. (Service)
 B1F, 2F, 1480-6, Gayang-Dong, Gangseo-Gu, Seoul, 157-200, Korea
 Tel: +82-2-3660-9632 / Fax: +82-2-3663-0475
 Area covered: Korea

Shanghai FA Center

Mitsubishi Electric Automation (CHINA) Ltd.
 4/F., Zhi Fu Plaza No.80 Xin Chang Road, Shanghai 200003, China
 Tel: +86-21-2322-3030 / Fax: +86-21-2322-3000
 Area covered: China

Tianjin FA Center

Mitsubishi Electric Automation (CHINA) Ltd. Tianjin Office
 B-2-801-802, Youyi Building, 50 Youyi Road, Hexi District, Tianjin, China
 Tel: +86-22-2813-1015 / Fax: +86-22-2813-1017
 Area covered: China

Beijing FA Center

Mitsubishi Electric Automation (CHINA) Ltd. Beijing Office
 Unit904-905, 9F, Office Tower, Henderson Centre, 18 Jianguomennei Avenue, Dongcheng District, Beijing, China
 Tel: +86-10-6518-8830 / Fax: +86-10-6518-3907
 Area covered: China

Guangzhou FA Center

Mitsubishi Electric Automation (CHINA) Ltd. Guangzhou Office
 Rm. 1609, North Tower, The Hub Center, No.1068, Xin Gang East Road, Haizhu District, Guangzhou, China
 Tel: +86-20-8923-6730 / Fax: +86-20-8923-6715
 Area covered: China

Taiwan FA Center (Taipei)

Setsuyo Enterprise Co., Ltd.
 3F., No.105, Wugong 3rd, Wugu Dist, New Taipei City 24889, Taiwan, R.O.C.
 Tel: +886-2-2299-9917 / Fax: +886-2-2299-9963
 Area covered: Taiwan

Taiwan FA Center (Taichung)

Mitsubishi Electric Taiwan Co., Ltd.
 No.8-1.Industrial 16th Road, Taichung Industrial Park, Taichung, Taiwan 407, R.O.C.
 Tel: +886-(0)4-2359-0688 / Fax: +886-(0)4-2359-0689
 Area covered: Taiwan

ASEAN FA Center

Mitsubishi Electric Asia Pte. Ltd. ASEAN Factory Automation Centre
 307 Alexandra Road #05-01/02, Mitsubishi Electric Building, Singapore
 Tel: +65-6470-2460 / Fax: +65-6476-7439
 Area covered: Southeast Asia, India

India FA Center

Mitsubishi Electric India Pvt. Ltd. India Factory Automation Centre
 2nd Floor, DLF Building No.9B, DLF Cyber City Phase III, Gurgaon 122002, Haryana, India
 Tel: +91-124-4630300 / Fax: +91-124-4630399
 Area covered: India

Thailand FA Center

Mitsubishi Electric Automation (Thailand) Co., Ltd.
 Bang-Chan Industrial Estate No.111, Soi Serithai 54, T.Kannayao, A.Kannayao, Bangkok10230, Thailand
 Tel: +66-2906-3238 / Fax: +66-2906-3239
 Area covered: Thailand

QnAS

CPU, base, power supply

Product	Model	Outline	
CPU	Q2ASCPU	No. of I/O points: 512 points, no. of I/O device points: 8192 points, program capacity: 28 k steps, basic instruction processing speed (LD instruction): 0.20 μs	
	Q2ASCPU-S1	No. of I/O points: 1024 points, no. of I/O device points: 8192 points, program capacity: 60 k steps, basic instruction processing speed (LD instruction): 0.20 μs	
	Q2ASHCPU	No. of I/O points: 512 points, no. of I/O device points: 8192 points, program capacity: 28 k steps, basic instruction processing speed (LD instruction): 0.075 μs	
	Q2ASHCPU-S1	No. of I/O points: 1024 points, no. of I/O device points: 8192 points, program capacity: 60 k steps, basic instruction processing speed (LD instruction): 0.075 μs	
Base	Main base	A1S38HB	8 slots, power supply module required, for QnAS and AnS Series modules, high-speed access for QnAS Series
		A1S38HBEU	8 slots, power supply module required, for QnAS and AnS Series modules, high-speed access for QnAS Series, CE compliant
		A1S38B	8 slots, power supply module required, for QnAS/AnS Series modules
	Extension base	A1S35B	5 slots, power supply module required, for QnAS/AnS Series modules
		A1S33B	3 slots, power supply module required, for QnAS/AnS Series modules
		A1S32B	2 slots, power supply module required, for QnAS/AnS Series modules
		A1S58B	8 slots, power supply module not required, for QnAS/AnS Series modules
		A1S55B	5 slots, power supply module not required, for QnAS/AnS Series modules
		A1S52B	2 slots, power supply module not required, for QnAS/AnS Series modules
	Extension cable	A1S68B	8 slots, power supply module required, for QnAS/AnS Series modules
		A1S65B	5 slots, power supply module required, for QnAS/AnS Series modules
		A1SC01B	For extension base horizontal connection, 0.055 m *One cable per extension base required
		A1SC03B	For extension base connection, 0.3 m *One cable per extension base required
		A1SC07B	For extension base connection, 0.7 m *One cable per extension base required
	Blank cover	A1SC12B	For extension base connection, 1.2 m *One cable per extension base required
		A1SC30B	For extension base connection, 3 m *One cable per extension base required
A1SC60B		For extension base connection, 6 m *One cable per extension base required	
Power supply	A1SG60	Blank cover for I/O slot	
	A1S61PN	Input voltage range: 100 to 240 V AC, output voltage: 5 V DC, output current: 5 A	
	A1S62PN	Input voltage range: 100 to 240 V AC, output voltage: 5/24 V DC, output current: 3/0.6 A	
Memory card	A1S63P	Input voltage range: 24 V DC, output voltage: 5 V DC, output current: 5 A	
	A6BAT	For IC-RAM memory/A7HGP CMOS back-up	
	Q1MEM-64S	SRAM memory card (JEIDA Ver.4.1 compliant), RAM capacity: 64 KB	
	Q1MEM-128S	SRAM memory card (JEIDA Ver.4.1 compliant), RAM capacity: 128 KB	
	Q1MEM-256S	SRAM memory card (JEIDA Ver.4.1 compliant), RAM capacity: 256 KB	
	Q1MEM-512S	SRAM memory card (JEIDA Ver.4.1 compliant), RAM capacity: 512 KB	
	Q1MEM-1MS	SRAM memory card (JEIDA Ver.4.1 compliant), RAM capacity: 1 MB	
	Q1MEM-2MS	SRAM memory card (JEIDA Ver.4.1 compliant), RAM capacity: 2 MB	
	Q1MEM-64SE	SRAM+E2PROM memory card (JEIDA Ver.4.1 compliant), RAM capacity: 32 KB, E2PROM capacity: 32 KB	
	Q1MEM-128SE	SRAM+E2PROM memory card (JEIDA Ver.4.1 compliant), RAM capacity: 64 KB, E2PROM capacity: 64 KB	
Q1MEM-256SE	SRAM+E2PROM memory card (JEIDA Ver.4.1 compliant), RAM capacity: 128 KB, E2PROM capacity: 128 KB		
Q1MEM-512SE	SRAM+E2PROM memory card (JEIDA Ver.4.1 compliant), RAM capacity: 256 KB, E2PROM capacity: 256 KB		
Q1MEM-1MSE	SRAM+E2PROM memory card (JEIDA Ver.4.1 compliant), RAM capacity: 512 KB, E2PROM capacity: 512 KB		

QnAS

I/O module

Product	Model	Outline	
DC (Positive common)	A1SX40	16 points, 12/24 V DC, 3/7 mA, response time:10 ms, 16 points/common, positive common, 20-point terminal block	
	A1SX40-S1	16 points, 24 V DC, 7 mA, response time: 0.2 ms, 16 points/common, positive common, 20-point terminal block, high-speed input	
	A1SX40-S2	16 points, 24 V DC, 7 mA, response time: 10 ms, 16 points/common, positive common, 20-point terminal block, for high leakage current sensor	
	A1SX41	32 points, 12/24 V DC, 3/7 mA, response time: 10 ms, 32 points/common, positive common, 40-pin connector	
	A1SX41-S1	32 points, 24 V DC, 7 mA, response time: 0.3 ms, 32 points/common, positive common, 40-pin connector, high-speed input	
	A1SX41-S2	32 points, 24 V DC, 7 mA, response time: 10 ms, 32 points/common, positive common, 40-pin connector, for high leakage current sensor	
	A1SX42	64 points, 12/24 V DC, 2/5 mA, response time: 10 ms, 32 points/common, positive common, 40-pin connector	
	A1SX42-S1	64 points, 24 V DC, 5 mA, response time: 0.3 ms, 32 points/common, positive common, 40-pin connector, high-speed input	
	A1SX42-S2	64 points, 24 V DC, 5 mA response time: 10 ms, 32 points/common, positive common, 40-pin connector, for high leakage current sensor	
	Dynamic input	A1S42X	16/32/48/64 points, 12/24 V DC, 4/9 mA, response time: 0.4 ms, 24-pin connector, high-speed dynamic input
Input	AC100	A1SX10	16 points, 100 to 120 V AC, 6 mA, response time: 35 ms, 16 points/common, 20-point terminal block
	AC200	A1SX10EU	16 points, 100 to 120 V AC, 7 mA, response time: 35 ms, 16 points/common, 20-point terminal block, CE compliant
		A1SX20	16 points, 200 to 240 V AC, 9 mA, response time: 55 ms, 16 points/common, 20-point terminal block
DC (Positive/negative common)	A1SX71	32 points, 5/12/24 V DC, 1.2/3.3/7 mA, response time: 3 ms, 32 points/common, positive/negative common, 40-pin connector	
	A1SX80	16 points, 12/24 V DC, 3/7 mA, response time: 10 ms, 16 points/common, positive/negative common, 20-point terminal block	
	A1SX80-S1	16 points, 24 V DC, 7 mA, response time: 0.5 ms, 16 points/common, positive/negative common, 20-point terminal block, high-speed input	
	A1SX80-S2	16 points, 24 V DC, 7 mA, response time: 10 ms, 16 points/common, positive/negative common, 20-point terminal block, for high leakage current sensor	
	A1SX81	32 points, 12/24 V DC, 3/7 mA, response time: 10 ms, 32 points/common, positive/negative common, 37-pin D-sub connector	
	A1SX81-S2	32 points, 24 V DC, 7 mA, response time: 10 ms, 32 points/common, positive/negative common, 37-pin D-sub connector, for high leakage current sensor	
	A1SX82-S1	64 points, 24 V DC, 5 mA, response time: 0.3 ms, 32 points/common, positive/negative common, 40-pin connector, high-speed input	
	AC/DC	A1SX30	16 points, 12 V AC/24 V AC/12 V DC/24 V DC, 4.2 mA (12 V AC, 12 V DC)/8.6 mA (24 V AC, 24 V DC), response time: 2.5 ms, 16 points/common, 20-point terminal block
Output	Relay	A1SY10	16 points, 24 V DC/240 V AC, 2 A/point, 8 A/common, response time: 12 ms, 8 points/common, 20-point terminal block
		A1SY10EU	16 points, 24 V DC/120 V AC, 2 A/point, 8 A/common, response time: 12 ms, 8 points/common, 20-point terminal block, CE compliant
		A1SY14EU	12 points, 24 V DC/240 V AC, 2 A/point, 8 A/common, response time: 12 ms, 4 points/common, 20-point terminal block, CE compliant
		A1SY18A	8 points, 24 V DC/240 V AC, 2 A/point, 8 A/module, response time: 12 ms, all points independent, 20-point terminal block
		A1SY18AEU	8 points, 24 V DC/240 V AC, 2 A/point, response time: 12 ms, all points independent, 20-point terminal block, CE compliant
	Triac	A1SY22	16 points, 100/240 V AC, leakage at OFF: 1.5 mA (120 V AC), 3 mA (240 V AC), response time: 0.5 Hz + 1 ms, 8 points/common, 20-point terminal block, with fuse and surge suppressor
		A1SY28A	8 points, 100 to 240 V AC, leakage at OFF: 1.5 mA (120 V AC), 3 mA (240 V AC), response time: 0.5 Hz + 1 ms, all points independent, 20-point terminal block, with surge suppressor
	Dynamic output	A1S42Y	16/32/48/64 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 24-pin connector, with fuse, dynamic output

QnAS

I/O module

Product	Model	Outline	
Output	Transistor (Sink)	A1SY40P	16 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 1 ms, 8 points/common, sink type, 20-point terminal block, with thermal/short-circuit protection and surge suppressor
		A1SY41P	32 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 1 ms, 32 points/common, sink type, 40-pin connector, with thermal/short-circuit protection and surge suppressor
		A1SY42P	64 points, 2/24 V DC, leakage at OFF: 0.1 mA, response time: 1 ms, 32 points/common, sink type, 40-pin connector, with thermal/short-circuit protection and surge suppressor
		A1SY50	16 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 8 points/common, sink type, 20-point terminal block, with fuse and surge suppressor
		A1SY60	16 points, 24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 8 points/common, sink type, 20-point terminal block, with fuse and surge suppressor
		Transistor (Source)	A1SY60E
	A1SY68A		8 points, 5/12/24/48 V DC, leakage at OFF: 0.1 mA, response time: 10 ms, all points independent, 20-point terminal block, with fuse and surge suppressor
	TTL CMOS	A1SY71	32 points, 5/12 V DC, response time: 1 ms, 32 points/common, sink type, 40-pin connector, with fuse
	Transistor (Source)	A1SY80	16 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 8 points/common, source type, 20-point terminal block, with fuse and surge suppressor
		A1SY81	32 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 32 points/common, source type, 37-pin D-sub connector, with fuse and surge suppressor
A1SY82		64 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 32 points/common, source type, 40-pin connector, with fuse and surge suppressor	
I/O	DC/transistor	A1SH42	Input: 32 points, 12/24 V DC, 2/5 mA, response time: 10 ms, 32 points/common; output 32 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 32 points/common, with fuse and surge suppressor; 40-pin connector
		A1SH42-S1	Input: 32 points, 24 V DC, 5 mA, response time: 0.3 ms, 32 points/common; output 32 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 32 points/common, with fuse and surge suppressor; 40-pin connector
		A1SH42P	Input: 32 points, 12/24 V DC, 2/5 mA, response time: 10 ms, 32 points/common, positive common; output: 32 points, 12/24 V DC leakage at OFF: 0.1 mA, response time: 1 ms, 32 points/common, sink type, with thermal/short-circuit protection and surge suppressor; 40-pin connector
		A1SH42P-S1	Input: 32 points, 24 V DC, 5 mA, response time: 0.3 ms, 32 points/common, positive common, high-speed input; output: 32 points, 12/24 V DC leakage at OFF: 0.1 mA, response time: 1 ms, 32 points/common, sink type, with thermal/short-circuit protection and surge suppressor; 40-pin connector
	DC/relay	A1SX48Y18	Input: 8 points, 24 V DC, 7 mA, response time: 10 ms, 8 points/common, positive common; output 8 points, 24 V DC/240 V AC, 2 A/point, 8 A/common, response time: 12 ms, 8 points/common; 20-point terminal block
DC/transistor	A1SX48Y58	Input: 8 points, 24 V DC, 7 mA, response time: 10 ms, 8 points/common, positive common; output 8 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 8 points/common, with fuse and surge suppressor; 20-point terminal block	
	Connector	A6CON1	40-pin connector, soldering type
A6CON2		40-pin connector, crimp-contact type	
A6CON3		40-pin connector, IDC for flat cables	
A6CON4		40-pin connector, soldering type (bidirectional cable connectable)	
A6CON1E		37-pin D-sub connector, soldering type	
A6CON2E		37-pin D-sub connector, crimp-contact type	
Connector/terminal block conversion module	A6CON3E	37-pin D-sub connector, IDC for flat cables	
	A6TBX36-E	For negative common input modules (standard type)	
	A6TBX54-E	For negative common input modules (2-wire type)	
	A6TBX70	For positive common input modules (3-wire type)	
	A6TBX70-E	For negative common input modules (3-wire type)	
	A6TBY36-E	For source type output modules (standard type)	
	A6TBY54-E	For source type output modules (2-wire type)	
	A6TBXY36	For positive common input modules and sink type output modules (standard type)	
A6TBXY54	For positive common input modules and sink type output modules (2-wire type)		

QnAS

I/O module

Product	Model	Outline
Connector/ terminal block conversion module	Cable	AC05TB For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 0.5 m
		AC10TB For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 1 m
		AC20TB For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 2 m
		AC30TB For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 3 m
		AC50TB For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 5 m
		AC80TB For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 8 m *Common power supply 0.5 A or lower
		AC100TB For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 10 m *Common power supply 0.5 A or lower
		AC05TB-E For A6TBX36-E, A6TBX36-E, A6TBX54-E, A6TBX54-E, A6TBX70-E (for negative common / source type); 0.5 m
		AC10TB-E For A6TBX36-E, A6TBX36-E, A6TBX54-E, A6TBX54-E, A6TBX70-E (for negative common / source type); 1 m
		AC20TB-E For A6TBX36-E, A6TBX36-E, A6TBX54-E, A6TBX54-E, A6TBX70-E (for negative common / source type); 2 m
		AC30TB-E For A6TBX36-E, A6TBX36-E, A6TBX54-E, A6TBX54-E, A6TBX70-E (for negative common / source type); 3 m
AC50TB-E For A6TBX36-E, A6TBX36-E, A6TBX54-E, A6TBX54-E, A6TBX70-E (for negative common / source type); 5 m		
Relay terminal module	A6TE2-16SRN	16 points, 24 V DC/240 V AC, ZA/point, 8 A/common, response time: 12 ms, 8 points/common, 40-pin connector
Relay terminal module	Cable	AC06TE For A6TE2-16SRN, 0.6 m
		AC10TE For A6TE2-16SRN, 1 m
		AC30TE For A6TE2-16SRN, 3 m
		AC50TE For A6TE2-16SRN, 5 m
		AC100TE For A6TE2-16SRN, 10 m
Interrupt input	A1S161	Interrupt input: 16 points, 12/24 V DC, 4/8 mA, response time: 0.2 ms, 16 points/common, 20-point terminal block
Dummy module	A1SG62	16/32/48/64-point dummy module
Conversion adapter	AnS conversion adapter	A1S-TA32 32-point IDC terminal block adapter, 0.5 mm ² (AWG20)
		A1S-TA32-3 32-point IDC terminal block adapter, 0.3 mm ² (AWG22)
		A1S-TA32-7 32-point IDC terminal block adapter, 0.75 mm ² (AWG18)
		A1S-TB32 32-point terminal block adapter, 0.14 to 0.75 mm ² (AWG26 to 18), for conversion to European type terminal block

Analog I/O module

Product	Model	Outline
Analog input	Voltage/ current input	A1S64AD 4 channels; input: -10 to 10 V DC, -20 to 20 mA; output (resolution): -4000 to 4000, -8000 to 8000, -12000 to 12000; conversion speed: 20 ms/channel; 20-point terminal block
		A1S68AD 8 channels; input: -10 to 10 V DC, 0 to 20 mA; output (resolution): 0 to 4000, -2000 to 2000; conversion speed: 0.5 ms/channel; 20-point terminal block
Analog output	Voltage/ current output	A1S62DA 2 channels; input (resolution): -4000 to 4000, 0 to 4000 / -8000 to 8000, 0 to 8000 / -12000 to 12000, 0 to 12000; output: -10 to 10 V DC, 0 to 20 mA; conversion speed: 25 ms/2 channels; 20-point terminal block
		A1S68DAV 8 channels, input (resolution): -2000 to 2000, output: -10 to 10 V DC, conversion speed: 4 ms/8 channels, 20-point terminal block
		A1S68DAI 8 channels, input (resolution): 0 to 4000, output: 4 to 20 mA DC, conversion speed: 4 ms/8 channels, 20-point terminal block
Analog I/O		A1S63ADA Analog input: 2 channels; input: -10 to 10 V DC, -20 to 20 mA; analog output: 1 channel; output: -10 to 10 V DC, 0 to 20 mA; resolution: 1/4000, 1/8000, 1/12000; conversion speed: 3 ms/channel (at 1/12000); 20-point terminal block
		A1S66ADA Analog input: 4 channels; analog output: 2 channels; analog I/O: -10 to 10 V DC, 0 to 20 mA; resolution: 1/4000; conversion speed: 400 μs/4 channels (analog input), 240 μs/2 channels (analog output); 20-point terminal block
Temperature input	Platinum RTD	A1S62RD3N 2 channels, 3-wire type platinum RTD (Pt100 [JIS C1604-1997, IEC 751-am2, JIS C1604-1989, DIN 43760-1980], JPt100 [JIS C1604-1981]), conversion speed: 40 ms/channel, 20-point terminal block
		A1S62RD4N 2 channels, 4-wire type platinum RTD (Pt100 [JIS C1604-1997, IEC 751-am2, JIS C1604-1989, DIN 43760-1980], JPt100 [JIS C1604-1981]), conversion speed: 40 ms/channel, 20-point terminal block
	Thermocouple	A1S68TD 8 channels, thermocouple (K, E, J, T, B, R, S), conversion speed: 400 ms/8 channels, 20-point terminal block
Temperature control		A1S64TCTRT Standard control: 4 channels, heating-cooling control: 2 channels; thermocouple (K, J, T, B, S, E, R, N, U, L, PLII, W5Re/W26Re), platinum RTD (Pt100, JPt100); sampling cycle: 0.5 s/4 channels (standard control), 0.5 s/2 channels, (heating-cooling control); 20-point terminal block
		A1S64TCTRTBW Standard control: 4 channels, heating-cooling control: 2 channels; thermocouple (K, J, T, B, S, E, R, N, U, L, PLII, W5Re/W26Re), platinum RTD (Pt100, JPt100); sampling cycle: 0.5 s/4 channels (standard control), 0.5 s/2 channels, (heating-cooling control); with heater disconnection detection; 20-point terminal block

QnAS

Pulse I/O and positioning module

Product	Model	Outline
High speed counter	A1SD61	1 channel; 50/10 kpps; count input signal: 5/12/24 V DC; external input: 5/12/24 V DC; comparison output: transistor (open collector), 12/24 V DC, 0.1 A/point, 0.8 A/common; 20-point terminal block
	A1SD62	2 channels; 100/10 kpps; count input signal: 5/12/24 V DC; external input: 5/12/24 V DC; coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 20-point terminal block
	A1SD62E	2 channels; 100/10 kpps; count input signal: 5/12/24 V DC; external input: 5/12/24 V DC; coincidence output: transistor (source), 12/24 V DC, 0.1 A/point, 0.4 A/common; 20-point terminal block
	A1SD62D	2 channels; 200/10 kpps; count input signal: RS-422-A (differential line driver); external input: 5/12/24 V DC, coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 20-point terminal block
	A1SD62D-S1	2 channels; 200/10 kpps; count input signal: RS-422-A (differential line driver); external input: RS-422-A (differential line driver); coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 20-point terminal block
Positioning	A1SD70	1 axis, control unit: pulse, no. of positioning data: 1 piece/axis, 15-pin connector/9-pin connector, analog voltage output (-10 to 10 V DC)
Positioning	Open collector output/ Differential output	A1SD75P1-S3 1 axis; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis; max. output pulse: 400 kpps (differential driver), 200 kpps (open collector); 36-pin connector
		A1SD75P2-S3 2 axes; 2-axis linear interpolation/ 2-axis circular interpolation; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis; max. output pulse: 400 kpps (differential driver), 200 kpps (open collector); 36-pin connector
		A1SD75P3-S3 3 axes; 2-axis linear interpolation/ 2-axis circular interpolation; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis; max. output pulse: 400 kpps (differential driver), 200 kpps (open collector); 36-pin connector
	SSCNET connection	A1SD75M1 1 axis; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis; 36-pin connector; SSCNET connection
		A1SD75M2 2 axes; 2-axis linear interpolation/ 2-axis circular interpolation; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis; 36-pin connector; SSCNET connection
		A1SD75M3 3 axes; 2-axis linear interpolation/ 2-axis circular interpolation; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis 36-pin connector; SSCNET connection
	Cable	AD75C20SJ2 Cable for connecting AD75P□/A1SD75P□ positioning module and MR-J2□, 2 m
		AD75C20SNJ2 Cable for connecting AJ65BT-D75P2-S3 positioning module and MR-J2□/J2S, 2 m
		A1SD75-C01HA Conversion cable for connecting A1SD75P□/M□ and peripheral devices
	Bracket	AD75CK
Position detection	A1S62LS	No. of position detection axes: 1, resolution: 4096 × 32 rotations to 409.6 × 320 rotations, no. of output channels: 16

Information module

Ethernet	A1SJ71QE71N3-T	10BASE-T
Serial communication	A1SJ71QC24N1	RS-232: 1 channel, RS-422/485: 1 channel, transmission speed: 2 channels can be used simultaneously at 115.2 kbps
	A1SJ71QC24N1-R2	RS-232: 2 channels, transmission speed: 2 channels can be used simultaneously at 115.2 kbps
Intelligent communication	SW□IVD-AD51HP	Software package for QD51H, AD51H-S3, A1SD51S

Control network module

Product	Model	Outline
CC-Link	A1SJ61QBT11	Master/local station, for QnASCPU
AS-i	A1SJ71AS92	AS-i system master module
MELSEC NET/10	SI/QSI optical cable	A1SJ71QLP21 SI/QSI/H-PCF/broadband H-PCF optical cable, double loop, PLC-to-PLC network (control/normal station)/remote I/O network (remote master station)
		A1SJ71QLP21S SI/QSI/H-PCF/broadband H-PCF optical cable, double loop, PLC-to-PLC network (control/normal station)/remote I/O network (remote master station), with external supply power function
	Coaxial cable	A1SJ71QLR21 3C-2V/5C-2V coaxial cable, double loop, PLC-to-PLC network (control/normal station)/remote I/O network (remote master station)
		A1SJ72QLP25 SI/QSI/H-PCF/broadband H-PCF optical cable, double loop, remote I/O network (remote I/O station)
	Coaxial cable	A1SJ72QLR25 3C-2V/5C-2V coaxial cable, double loop, remote I/O network (remote I/O station)
		A1SJ71QBR11 3C-2V/5C-2V coaxial cable, single bus, PLC-to-PLC network (control/normal station)/remote I/O network (remote master station)
MELSECNET(II)	A1SJ72QBR15 3C-2V/5C-2V coaxial cable, single bus, remote I/O network (remote I/O station)	
	A1SJ71AP21 SI-200/250 optical cable, double loop, MELSECNET(II) master/local station	
	A1SJ71AR21 3C-2V/5C-2V coaxial cable, double, loop MELSECNET(II) master/local station	
MELSECNET/B	A1SJ71AT21B	Twisted pair cable, single bus, MELSECNET/B (master/local station)
MELSEC-I/O Link	A1SJ51T64	Twisted pair/cab-tire cable, single bus, MELSEC-I/O Link (master module)

Peripheral devices

Programming module	Cable	AC30R4	Cable for connecting CPU and A7PU/A7HGP/A6GPP, 3 m *A7HGP-SET/A6GPP-SET provided
Modem interface module		Q6TEL	Interface module to connect peripheral devices to the telephone line

AnS

CPU, base, power supply

Product	Model	Outline	
CPU	A1SCPUC24-R2	No. of I/O points: 256 points, no. of I/O device points: 256 points, program capacity: 8 k steps, basic instruction processing speed (LD instruction): 1.0 μs, built-in RAM memory capacity: 32 KB, with computer link function	
	A1SHCPU	No. of I/O points: 256 points, no. of I/O device points: 256 points, program capacity: 8 k steps, basic instruction processing speed (LD instruction): 0.33 μs, built-in RAM memory capacity: 64 KB	
	A1SJHCPU	No. of I/O points: 256 points, no. of I/O device points: 256 points, program capacity: 8 k steps, basic instruction processing speed (LD instruction): 0.33 μs, built-in RAM memory capacity: 64 KB, 5 slots, 100 to 240 V AC input/5 V DC 3 A output power supply	
	A2SHCPU	No. of I/O points: 512 points, no. of I/O device points: 512 points, program capacity: 14 k steps, basic instruction processing speed (LD instruction): 0.25 μs, built-in RAM memory capacity: 64 KB	
	A2USCPU	No. of I/O points: 512 points, no. of I/O device points: 8192 points, program capacity: 14 k steps, basic instruction processing speed (LD instruction): 0.2 μs, built-in RAM memory capacity: 64 KB	
	A2USHCPU-S1	No. of I/O points: 1024 points, no. of I/O device points: 8192 points, program capacity: 30 k steps, basic instruction processing speed (LD instruction): 0.09 μs, built-in RAM memory capacity: 256 KB	
Base	Main base	A1S38B	8 slots, power supply module required, for QnAS/AnS Series modules
		A1S35B	5 slots, power supply module required, for QnAS/AnS Series modules
		A1S33B	3 slots, power supply module required, for QnAS/AnS Series modules
		A1S32B	2 slots, power supply module required, for QnAS/AnS Series modules
	Extension base	A1S58B	8 slots, power supply module not required, for QnAS/AnS series modules
		A1S55B	5 slots, power supply module not required, for QnAS/AnS series modules
		A1S52B	2 slots, power supply module not required, for QnAS/AnS series modules
		A1S68B	8 slots, power supply module required, for QnAS/AnS Series modules
	Extension cable	A1S65B	5 slots, power supply module required, for QnAS/AnS Series modules
		A1SC01B	For extension base horizontal connection, 0.055 m * One cable per extension base required
		A1SC03B	For extension base connection, 0.3 m * One cable per extension base required
		A1SC07B	For extension base connection, 0.7 m * One cable per extension base required
		A1SC12B	For extension base connection, 1.2 m * One cable per extension base required
	Blank cover	A1SC30B	For extension base connection, 3 m * One cable per extension base required
		A1SC60B	For extension base connection, 6 m * One cable per extension base required
		A1SG60	Blank cover for I/O slot
Power supply	A1S61PN	Input voltage range: 100 to 240 V AC, output voltage: 5 V DC, output current: 5 A	
	A1S62PN	Input voltage range: 100 to 240 V AC, output voltage: 5/24 V DC, output current: 3/0.6 A	
	A1S63P	Input voltage range: 24 V DC, output voltage: 5 V DC, output current: 5 A	
Battery	A6BAT	For IC-RAM memory/A7HGP CMOS back-up	
Memory cassette	A1SNMCA-2KE	Program capacity: 2 k steps, EEPROM cassette (exclusively for A1S, A1SH, A1SJ, and A1SJH)	
	A1SNMCA-8KE	Program capacity: 8 k steps, EEPROM cassette (exclusively for A1S, A1SH, A1SJ, and A1SJH)	
	A1SNMCA-8KP	Program capacity: 8 k steps, EPROM cassette (exclusively for A1S, A1SH, A1SJ, and A1SJH)	
	A2SNMCA-30KE	Program capacity: 30 k steps, EEPROM cassette (for A2S, A2SH, A2US(S1), and A2USH-S1)	

AnS

I/O module

Product	Model	Outline
DC (Positive common)	A1SX40	16 points, 12/24 V DC, 3/7 mA, response time: 10 ms, 16 points/common, positive common, 20-point terminal block
	A1SX40-S1	16 points, 24 V DC, 7 mA, response time: 0.2 ms, 16 points/common, positive common, 20-point terminal block, high-speed input
	A1SX40-S2	16 points, 24 V DC, 7 mA, response time: 10 ms, 16 points/common, positive common, 20-point terminal block, for high leakage current sensor
	A1SX41	32 points, 12/24 V DC, 3/7 mA, response time: 10 ms, 32 points/common, positive common, 40-pin connector
	A1SX41-S1	32 points, 24 V DC, 7 mA, response time: 0.3 ms, 32 points/common, positive common, 40-pin connector, high-speed input
	A1SX41-S2	32 points, 24 V DC, 7 mA, response time: 10 ms, 32 points/common, positive common, 40-pin connector, for high leakage current sensor
	A1SX42	64 points, 12/24 V DC, 2/5 mA, response time: 10 ms, 32 points/common, positive common, 40-pin connector
	A1SX42-S1	64 points, 24 V DC, 5 mA, response time: 0.3 ms, 32 points/common, positive common, 40-pin connector, high-speed input
	A1SX42-S2	64 points, 24 V DC, 5 mA response time: 10 ms, 32 points/common, positive common, 40-pin connector, for high leakage current sensor
	Dynamic input	A1S42X
AC100	A1SX10	16 points, 100 to 120 V AC, 6 mA, response time: 35 ms, 16 points/common, 20-point terminal block
	A1SX10EU	16 points, 100 to 120 V AC, 7 mA, response time: 35 ms, 16 points/common, 20-point terminal block, CE compliant
AC200	A1SX20	16 points, 200 to 240 V AC, 9 mA, response time: 55 ms, 16 points/common, 20-point terminal block
	A1SX20EU	16 points, 200 to 240 V AC, 11 mA, response time: 55 ms, 16 points/common, 20-point terminal block, CE compliant
DC (Positive/negative common)	A1SX71	32 points, 5/12/24 V DC, 1.2/3.3/7 mA, response time: 3 ms, 32 points/common, positive/negative common, 40-pin connector
	A1SX80	16 points, 12/24 V DC, 3/7 mA, response time: 10 ms, 16 points/common, positive/negative common, 20-point terminal block
	A1SX80-S1	16 points, 24 V DC, 7 mA, response time: 0.5 ms, 16 points/common, positive/negative common, 20-point terminal block, high-speed input
	A1SX80-S2	16 points, 24 V DC, 7 mA, response time: 10 ms, 16 points/common, positive/negative common, 20-point terminal block, for high leakage current sensor
	A1SX81	32 points, 12/24 V DC, 3/7 mA, response time: 10 ms, 32 points/common, positive/negative common, 37-pin D-sub connector
	A1SX81-S2	32 points, 24 V DC, 7 mA, response time: 10 ms, 32 points/common, positive/negative common, 37-pin D-sub connector, for high leakage current sensor
	A1SX82-S1	64 points, 24 V DC, 5 mA, response time: 0.3 ms, 32 points/common, positive/negative common, 40-pin connector, high-speed input
	AC/DC	A1SX30

AnS

I/O module

Product	Model	Outline	
Relay	A1SY10	16 points, 24 V DC/240 V AC, 2 A/point, 8 A/common, response time: 12 ms, 8 points/common, 20-point terminal block	
	A1SY10EU	16 points, 24 V DC/120 V AC, 2 A/point, 8 A/common, response time: 12 ms, 8 points/common, 20-point terminal block, CE compliant	
	A1SY14EU	12 points, 24 V DC/240 V AC, 2 A/point, 8 A/common, response time: 12 ms, 4 points/common, 20-point terminal block, CE compliant	
	A1SY18A	8 points, 24 V DC/240 V AC, 2 A/point, 8 A/module, response time: 12 ms, all points independent, 20-point terminal block	
	A1SY18AEU	8 points, 24 V DC/240 V AC, 2 A/point, response time: 12 ms, all points independent, 20-point terminal block, CE compliant	
Triac	A1SY22	16 points, 100/240 V AC, leakage at OFF: 1.5 mA (120 V AC), 3 mA (240 V AC), response time: 0.5 Hz + 1 ms, 8 points/common, 20-point terminal block, with fuse and surge suppressor	
	A1SY28A	8 points, 100 to 240 V AC, leakage at OFF: 1.5 mA (120 V AC), 3 mA (240 V AC), response time: 0.5 Hz + 1 ms, all points independent, 20-point terminal block, with surge suppressor	
Dynamic output	A1S42Y	16/32/48/64 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 24-pin connector, with fuse, dynamic output	
Output	Transistor (Sink)	A1SY40P	16 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 1 ms, 8 points/common, sink type, 20-point terminal block, with thermal/short-circuit protection and surge suppressor
		A1SY41P	32 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 1 ms, 32 points/common, sink type, 40-pin connector, with thermal/short-circuit protection and surge suppressor
	A1SY42P	64 points, 2/24 V DC, leakage at OFF: 0.1 mA, response time: 1 ms, 32 points/common, sink type, 40-pin connector, with thermal/short-circuit protection and surge suppressor	
	A1SY50	16 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 8 points/common, sink type, 20-point terminal block, with fuse and surge suppressor	
	A1SY60	16 points, 24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 8 points/common, sink type, 20-point terminal block, with fuse and surge suppressor	
Transistor (Source)	A1SY60E	16 points, 5/12/24 V DC, leakage at OFF: 0.1 mA, response time: 10 ms, 8 points/common, source type, 20-point terminal block, with fuse and surge suppressor	
Transistor	A1SY68A	8 points, 5/12/24/48 V DC, leakage at OFF: 0.1 mA, response time: 10 ms, all points independent, 20-point terminal block, with surge suppressor	
TTL CMOS	A1SY71	32 points, 5/12 V DC, response time: 1 ms, 32 points/common, sink type, 40-pin connector, with fuse	
Transistor (Source)	A1SY80	16 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 8 points/common, source type, 20-point terminal block, with fuse and surge suppressor	
	A1SY81	32 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 32 points/common, source type, 37-pin D-sub connector, with fuse and surge suppressor	
	A1SY82	64 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 32 points/common, source type, 40-pin connector, with fuse and surge suppressor	
I/O	DC/transistor	A1SH42	Input: 32 points, 12/24 V DC, 2/5 mA, response time: 10 ms, 32 points/common; output 32 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 32 points/common, with fuse and surge suppressor; 40-pin connector
		A1SH42-S1	Input: 32 points, 24 V DC, 5 mA, response time: 0.3 ms, 32 points/common; output 32 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 32 points/common, with fuse and surge suppressor; 40-pin connector
		A1SH42P	Input: 32 points, 12/24 V DC, 2/5 mA, response time: 10 ms, 32 points/common, positive common; output: 32 points, 12/24 V DC leakage at OFF: 0.1 mA, response time: 1 ms, 32 points/common, sink type, with thermal/short-circuit protection and surge suppressor; 40-pin connector
		A1SH42P-S1	Input: 32 points, 24 V DC, 5 mA, response time: 0.3 ms, 32 points/common, positive common, high-speed input; output: 32 points, 12/24 V DC leakage at OFF: 0.1 mA, response time: 1 ms, 32 points/common, sink type, with thermal/short-circuit protection and surge suppressor; 40-pin connector
DC/relay	A1SX48Y18	Input: 8 points, 24 V DC, 7 mA, response time: 10 ms, 8 points/common, positive common; output 8 points, 24 V DC/240 V AC, 2 A/point, 8 A/common, response time: 12 ms, 8 points/common; 20-point terminal block	
DC/transistor	A1SX48Y58	Input: 8 points, 24 V DC, 7 mA, response time: 10 ms, 8 points/common, positive common; output 8 points, 12/24 V DC, leakage at OFF: 0.1 mA, response time: 2 ms, 8 points/common, with fuse and surge suppressor; 20-point terminal block	
Connector	A6CON1	40-pin connector, soldering type	
	A6CON2	40-pin connector, crimp-contact type	
	A6CON3	40-pin connector, IDC for flat cables	
	A6CON4	40-pin connector, soldering type (bidirectional cable connectable)	
	A6CON1E	37-pin D-sub connector, soldering type	
	A6CON2E	37-pin D-sub connector, crimp-contact type	
A6CON3E	37-pin D-sub connector, IDC for flat cables		

AnS

I/O module

Product	Model	Outline	
Connector/terminal block conversion module	A6TBX36-E	For negative common input modules (standard type)	
	A6TBX54-E	For negative common input modules (2-wire type)	
	A6TBX70	For positive common input modules (3-wire type)	
	A6TBX70-E	For negative common input modules (3-wire type)	
	A6TBY36-E	For source type output modules (standard type)	
	A6TBY54-E	For source type output modules (2-wire type)	
Connector/terminal block conversion module	Cable	A6TBXY36	For positive common input modules and sink type output modules (standard type)
		A6TBXY54	For positive common input modules and sink type output modules (2-wire type)
		AC05TB	For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 0.5 m
		AC10TB	For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 1 m
		AC20TB	For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 2 m
		AC30TB	For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 3 m
	Cable	AC50TB	For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 5 m
		AC80TB	For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 8 m *Common power supply 0.5 A or lower
		AC100TB	For A6TBXY36, A6TBXY54, A6TBX70 (for positive common / sink type); 10 m *Common power supply 0.5 A or lower
		AC05TB-E	For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, A6TBX70-E (for negative common / source type); 0.5 m
		AC10TB-E	For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, A6TBX70-E (for negative common / source type); 1 m
		AC20TB-E	For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, A6TBX70-E (for negative common / source type); 2 m
AC30TB-E	For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, A6TBX70-E (for negative common / source type); 3 m		
AC50TB-E	For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, A6TBX70-E (for negative common / source type); 5 m		
Relay terminal module	A6TE2-16SRN	16 points, 24 V DC/240 V AC, ZA/point, 8 A/common, response time: 12 ms, 8 points/common, 40-pin connector	
Relay terminal module	Cable	AC06TE	For A6TE2-16SRN, 0.6 m
		AC10TE	For A6TE2-16SRN, 1 m
		AC30TE	For A6TE2-16SRN, 3 m
		AC50TE	For A6TE2-16SRN, 5 m
		AC100TE	For A6TE2-16SRN, 10 m
Interrupt input	A1S161	Interrupt input: 16 points, 12/24 V DC, 4/8 mA, response time: 0.2 ms, 16 points/common, 20-point terminal block	
Dummy module	A1SG62	16/32/48/64-point dummy module	
Conversion adapter	AnS conversion adapter	A1S-TA32	32-point IDC terminal block adapter, 0.5 mm ² (AWG20)
		A1S-TA32-3	32-point IDC terminal block adapter, 0.3 mm ² (AWG22)
		A1S-TA32-7	32-point IDC terminal block adapter, 0.75 mm ² (AWG18)
		A1S-TB32	32-point terminal block adapter, 0.14 to 0.75 mm ² (AWG26 to 18), for conversion to European type terminal block

Analog I/O module

Product	Model	Outline	
Analog input	Voltage/current input	A1S64AD	4 channels; input: -10 to 10 V DC, -20 to 20 mA; output (resolution): -4000 to 4000, -8000 to 8000, -12000 to 12000; conversion speed: 20 ms/channel; 20-point terminal block
		A1S68AD	8 channels; input: -10 to 10 V DC, 0 to 20 mA; output (resolution): 0 to 4000, -2000 to 2000; conversion speed: 0.5 ms/channel; 20-point terminal block
Analog output	Voltage/current output	A1S62DA	2 channels; input (resolution): -4000 to 4000, 0 to 4000 / -8000 to 8000, 0 to 8000 / -12000 to 12000, 0 to 12000; output: -10 to 10 V DC, 0 to 20 mA; conversion speed: 25 ms/2 channels; 20-point terminal block
		A1S68DAV	8 channels, input (resolution): -2000 to 2000, output: -10 to 10 V DC, conversion speed: 4 ms/8 channels, 20-point terminal block
		A1S68DAI	8 channels, input (resolution): 0 to 4000, output: 4 to 20 mA DC, conversion speed: 4 ms/8 channels, 20-point terminal block
Analog I/O		A1S63ADA	Analog input: 2 channels; input: -10 to 10 V DC, -20 to 20 mA; analog output: 1 channel; output: -10 to 10 V DC, 0 to 20 mA; resolution: 1/4000, 1/8000, 1/12000; conversion speed: 3 ms/channel (at 1/12000); 20-point terminal block
		A1S66ADA	Analog input: 4 channels; analog output: 2 channels; analog I/O: -10 to 10 V DC, 0 to 20 mA; resolution: 1/4000; conversion speed: 400 μs/4 channels (analog input), 240 μs/2 channels (analog output); 20-point terminal block
Temperature input	Platinum RTD	A1S62RD3N	2 channels, 3-wire type platinum RTD (Pt100 [JIS C1604-1997, IEC 751-am2, JIS C1604-1989, DIN 43760-1980], JPt100 [JIS C1604-1981]), conversion speed: 40 ms/channel, 20-point terminal block
		A1S62RD4N	2 channels, 4-wire type platinum RTD (Pt100 [JIS C1604-1997, IEC 751-am2, JIS C1604-1989, DIN 43760-1980], JPt100 [JIS C1604-1981]), conversion speed: 40 ms/channel, 20-point terminal block
	Thermocouple	A1S68TD	8 channels, thermocouple (K, E, J, T, B, R, S), conversion speed: 400 ms/8 channels, 20-point terminal block
Temperature control		A1S64TCTRT	Standard control: 4 channels, heating-cooling control: 2 channels; thermocouple (K, J, T, B, S, E, R, N, U, L, PLII, W5Re/W26Re), platinum RTD (Pt100, JPt100); sampling cycle: 0.5 s/4 channels (standard control), 0.5 s/2 channels, (heating-cooling control); 20-point terminal block
		A1S64TCTRTBW	Standard control: 4 channels, heating-cooling control: 2 channels; thermocouple (K, J, T, B, S, E, R, N, U, L, PLII, W5Re/W26Re), platinum RTD (Pt100, JPt100); sampling cycle: 0.5 s/4 channels (standard control), 0.5 s/2 channels, (heating-cooling control); with heater disconnection detection; 20-point terminal block

AnS

Pulse I/O and positioning module

Product	Model	Outline	
High speed counter	A1SD61	1 channel; 50/10 kpps; count input signal: 5/12/24 V DC; external input: 5/12/24 V DC; comparison output: transistor (open collector), 12/24 V DC, 0.1 A/point, 0.8 A/common; 20-point terminal block	
	A1SD62	2 channels; 100/10 kpps; count input signal: 5/12/24 V DC; external input: 5/12/24 V DC; coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 20-point terminal block	
	A1SD62E	2 channels; 100/10 kpps; count input signal: 5/12/24 V DC; external input: 5/12/24 V DC; coincidence output: transistor (source), 12/24 V DC, 0.1 A/point, 0.4 A/common; 20-point terminal block	
	A1SD62D	2 channels; 200/10 kpps; count input signal: RS-422-A (differential line driver); external input: 5/12/24 V DC, coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 20-point terminal block	
	A1SD62D-S1	2 channels; 200/10 kpps; count input signal: RS-422-A (differential line driver); external input: RS-422-A (differential line driver); coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 20-point terminal block	
Positioning	A1SD70	1 axis, control unit: pulse, no. of positioning data: 1 piece/axis, 15-pin connector/9-pin connector, analog voltage output (-10 to 10 V DC)	
Positioning	Open collector output/Differential output	A1SD75P1-S3	1 axis; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis; max. output pulse: 400 kpps (differential driver), 200 kpps (open collector); 36-pin connector
		A1SD75P2-S3	2 axes; 2-axis linear interpolation/ 2-axis circular interpolation; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis; max. output pulse: 400 kpps (differential driver), 200 kpps (open collector); 36-pin connector
		A1SD75P3-S3	3 axes; 2-axis linear interpolation/ 2-axis circular interpolation; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis; max. output pulse: 400 kpps (differential driver), 200 kpps (open collector); 36-pin connector
	SSCNET connection	A1SD75M1	1 axis; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis; 36-pin connector; SSCNET connection
		A1SD75M2	2 axes; 2-axis linear interpolation/ 2-axis circular interpolation; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis; 36-pin connector; SSCNET connection
		A1SD75M3	3 axes; 2-axis linear interpolation/ 2-axis circular interpolation; control unit: pulse, mm, inch, degree; no. of positioning data: 600 pieces/axis 36-pin connector; SSCNET connection
	Cable	AD75C20SJ2	Cable for connecting AD75P□/A1SD75P□ positioning module and MR-J2□A, 2 m
		AD75C20SNJ2	Cable for connecting AJ65BT-D75P2-S3 positioning module and MR-J2/J2S, 2 m
		A1SD75-C01HA	Conversion cable for connecting A1SD75P□/M□ and peripheral devices
	Bracket	AD75CK	Cable clamp bracket for AD75, GOT
A1S62LS		No. of position detection axes: 1, resolution: 4096 × 32 rotations to 409.6 × 320 rotations, no. of output channels: 16	

Information module

Ethernet	A1SJ71E71N3-T	10BASE-T
Computer link	A1SJ71UC24-R2	RS-232: 1 channel, transmission speed: 0.3 to 19.2 kbps, computer link function
	A1SJ71UC24-R4	RS-422/485: 1 channel, transmission speed: 0.3 to 19.2 kbps, computer link function, multidrop link function
	A1SJ71UC24-PRF	RS-232: 1 channel, transmission speed: 0.3 to 19.2 kbps, computer link function, printer function
Intelligent communication	SW□IVD-AD51HP	Software package for QD51H, AD51H-S3, A1SD51S
Programmable controller fault detection	A1SS91	Programmable controller fault detection module, RUN output: 1 point, Error output: 1 point, General-purpose output: 3 points

Control network module

Product	Model	Outline	
CC-Link	A1SJ61BT11	Master/local station, for AnSCPU	
AS-i	A1SJ71AS92	AS-i system master module	
MELSEC NET/10	SI/QSI optical cable	A1SJ72QLP25	SI/QSI/H-PCF/broadband H-PCF optical cable, double loop, remote I/O network (remote I/O station)
	Coaxial cable	A1SJ72QLR25	3C-2V/5C-2V coaxial cable, double loop, remote I/O network (remote I/O station)
		A1SJ72QBR15	3C-2V/5C-2V coaxial cable, single bus, remote I/O network (remote I/O station)
	SI/QSI optical cable	A1SJ71LP21	SI/QSI/H-PCF/broadband H-PCF optical cable, double loop, PLC-to-PLC network (control/normal station)/remote I/O network (remote master station)
	Coaxial cable	A1SJ71LR21	3C-2V/5C-2V coaxial cable, double loop, PLC-to-PLC network (control/normal station)/remote I/O network (remote master station)
A1SJ71BR11		3C-2V/5C-2V coaxial cable, single bus, PLC-to-PLC network (control/normal station)/remote I/O network (remote master station)	
MELSECNET(II)	A1SJ71AP21	SI-200/250 optical cable, double loop, MELSECNET(II) master/local station	
	A1SJ71AR21	3C-2V/5C-2V coaxial cable, double, loop MELSECNET(II) master/local station	
MELSECNET/B	A1SJ71AT21B	Twisted pair cable, single bus, MELSECNET/B (master/local station)	
MELSEC-I/O Link	A1SJ51T64	Twisted pair/cab-tire cable, single bus, MELSEC-I/O Link (master module)	

Peripheral devices

ROM writer module	EPROM write adapter	A6WA-28P	Write adapter for EPROM 28-pin
Programming module	Cable	AC30R4	Cable for connecting CPU and A7PU/A7HGP/A6GPP, 3 m *A7HGP-SET/A6GPP-SET provided
		AC30R4-PUS	Cable for connecting CPU and A8UPU/A7PUS
Modem interface module		Q6TEL	Interface module to connect peripheral devices to the telephone line
External display		A6DU-B	LCD: 16 characters x 2 rows, for data access (CPU operation status, device monitoring/changes)

Peripheral Devices

Product	Model	Outline
Printer cable	AC30R2	RS-232C connection cable between A6GPP and printer, 3 m
Floppy disk	SW□-USER	1.4 MB (2HD) MS-DOS formatted

MELSOFT

MELSOFT GX Series

GX Developer	SW□D5C-GPPW-E	MELSEC programmable controller programming software
	SW□D5C-GPPW-EV	MELSEC programmable controller programming software (Upgrade)
GX Simulator	SW□D5C-LLT-E	MELSEC programmable controller simulation software
	SW□D5C-LLT-EV	MELSEC programmable controller simulation software (Upgrade)
GX Explorer	SW□D5C-EXP-E	Maintenance tool
GX Converter	SW□D5C-CNVW-E	Excel®/text data converter
GX Configurator-AP	SW□D5C-AD75P-E	MELSEC-A dedicated: positioning module setting/monitoring tool for AD75P/M
GX Configurator-CC	SW□D5C-J61P-E	MELSEC-A dedicated: CC-Link module setting/monitoring tool
GX RemoteService-I	SW□D5C-RAS-E	Remote access tool
GX Works	SW□D5C-GPPLT-E	A set of three products: GX Developer, GX Simulator, GX Explorer

MELSOFT MX Series

MX Component	SW□D5C-ACT-E	ActiveX library for communication
MX Sheet	SW□D5C-SHEET-E	Excel® communication support tool
MX Works	SW□D5C-SHEETSET-E	A set of two products: MX Component, MX Sheet

Software

For IBM Compatible Personal computer	SW□IVD-MINIP-E	Software package for MELSECNET/MINI-S3
	SW□IVD-AD71P	Software package for positioning
	SW□IVD-AD75P-E	Positioning programming, for AD75

PC I/F Board

Product	Model	Outline	
MELSEC NET/H (10)	SI/QSI optical cable	Q80BD-J71LP21-25	PCI bus, Japanese/English OS compatible, SI/QSI optical cable, double loop, PLC-to-PLC network (control/normal station)
		Q80BD-J71LP21S-25	PCI bus, Japanese/English OS compatible, SI/QSI optical cable, double loop, PLC-to-PLC network (control/normal station), with external power supply function
	GI optical cable	Q80BD-J71LP21G	PCI bus, Japanese/English OS compatible, GI optical cable, double loop, PLC-to-PLC network (control/normal station)
Coaxial cable	Q80BD-J71BR11	PCI bus, Japanese/English OS compatible, 3C-2V/5C-2V coaxial cable, single bus, PLC-to-PLC network (control/normal station)	
	CC-Link	Q80BD-J61BT11N	PCI bus, Japanese/English OS compatible, for master/local station, CC-Link Ver.2 compatible

A-A1S Module Conversion Adapter

Please refer to the MELSEC-A/QnA Series Transition Guide L(NA)08077 for details.

For I/O modules	A1ADP-XY	Enables to mount AnS/QnAS (Small Type) Series I/O module on an empty slot of A/QnA (Large type) Series base
For special function modules	A1ADP-SP	Enables to mount AnS/QnAS (Small Type) Series special function module on an empty slot of A/QnA (Large type) Series base

MELSECNET (II) - MELSECNET/10 Gateway Set *1

Please refer to the MELSEC-A/QnA Series Transition Guide L(NA)08077 for details.

For MELSECNET (II)-MELSECNET/10 gateway	Q6KT-NETGW-SS	A set of A1S35B, A1S61PN, Q2ASCPU, A1SJ71AP21, A1SJ71QLP21
	Q6KT-NETGW-RS	A set of A1S35B, A1S61PN, Q2ASCPU, A1SJ71AR21, A1SJ71QLP21
	Q6KT-NETGW-RB	A set of A1S35B, A1S61PN, Q2ASCPU, A1SJ71AR21, A1SJ71QBR11
For MELSECNET/B-MELSECNET/10 gateway	Q6KT-NETGW-TS	A set of A1S35B, A1S61PN, Q2ASCPU, A1SJ71AT21B, A1SJ71QLP21
	Q6KT-NETGW-TB	A set of A1S35B, A1S61PN, Q2ASCPU, A1SJ71AT21B, A1SJ71QBR11

MELSECNET(II), MELSECNET/B Local Station Data Link Module

Please refer to the MELSEC-A/QnA Series Transition Guide L(NA)08077 for details.

MELSECNET(II), MELSECNET/B local station data link module	A1SJ71AP23Q	MELSECNET (II) local station data link module for SI optical cable
	A1SJ71AR23Q	MELSECNET (II) local station data link module for coaxial cable
	A1SJ71AT23BQ	MELSECNET/B local station data link module for shielded twisted pair cable

*1 Model name reading method

Q6KT-NETGW-□□
(1)(2)

(1) Network type: MELSECNET (II)
S: SI optical cable (Double loop)
R: Coaxial cable (Double loop)
T: Twisted pair cable (Bus)

(2) Network type: MELSECNET/10
S: SI optical cable (Double loop)
B: Coaxial cable (Bus)

Mitsubishi Programmable Controllers

Precautions before use

This publication explains the typical features and functions of the products herein and does not provide restrictions and other information related to usage and module combinations. Before using the products, always read the product user manuals. Mitsubishi Electric will not be held liable for damage caused by factors found not to be the cause of Mitsubishi Electric; opportunity loss or lost profits caused by faults in Mitsubishi Electric products; damage, secondary damage, or accident compensation, whether foreseeable or not, caused by special factors; damage to products other than Mitsubishi Electric products; and to other duties.

For safe use

- To use the products given in this publication properly, always read the relevant manuals before use.
- The products have been manufactured as general-purpose parts for general industries, and have not been designed or manufactured to be incorporated in a device or system used in purposes related to human life.
- Before using the products for special purposes such as nuclear power, electric power, aerospace, medicine or passenger movement vehicles, consult with Mitsubishi.
- The products have been manufactured under strict quality control. However, when installing the products where major accidents or losses could occur if the products fail, install appropriate backup or fail-safe functions in the system.

Country/Region	Sales office	Tel/Fax
USA	Mitsubishi Electric Automation Inc. 500 Corporate Woods Parkway Vernon Hills, IL 60061, USA	Tel : +1-847-478-2100 Fax : +1-847-478-0327
Brazil	MELCO-TEC Rep. Com.e Assessoria Tecnica Ltda. Av Paulista, 1439-Cj. 72 Cerqueira Cesar CEP 01311-200, Sao Paulo, SP, CEP:01311-200, Brazil	Tel : +55-11-3146-2200 Fax : +55-11-3146-2217
Germany	Mitsubishi Electric Europe B.V. German Branch Gothaer Strasse 8 D-40880 Ratingen, Germany	Tel : +49-2102-486-0 Fax : +49-2102-486-1120
UK	Mitsubishi Electric Europe B.V. UK Branch Travellers Lane, Hatfield, Hertfordshire., AL10 8XB, UK	Tel : +44-1707-276100 Fax : +44-1707-278992
Italy	Mitsubishi Electric Europe B.V. Italy Branch Viale Colleoni 7-20041 Agrate Brianza (Milano), Italy	Tel : +39-039-60531 Fax : +39-039-6053312
Spain	Mitsubishi Electric Europe B.V. Spanish Branch Carretera de Rubi 76-80 E-08190 Sant Cugat del Valles(Barcelona), Spain	Tel : +34-93-565-3131 Fax : +34-93-589-1579
France	Mitsubishi Electric Europe B.V. French Branch 25,Boulevard des Bouvets, F-92741 Nanterre Cedex, France	Tel : +33-1-5568-5568 Fax : +33-1-5568-5757
Czech Republic	Mitsubishi Electric Europe B.V. Czech Branch Avenir Business Park, Radlická 714/113a CZ-158 00 Praha 5	Tel : +420-251-551-470 Fax : +420-251-551-471
Poland	Mitsubishi Electric Europe B.V. Polish Branch ul. Krakowska 50 32-083 Balice, Poland	Tel : +48-12-630-47-00 Fax : +48-12-630-47-01
Russia	Mitsubishi Electric Europe B.V. Moscow Office 52/3, Kosmodamianskaya nab., 115054, Moscow, Russia	Tel : +7-812-633-3497 Fax : +7-812-633-3499
South Africa	Circuit Breaker Industries Ltd. Private Bag 2016, ZA-1600 Isando, South Africa	Tel : +27-11-928-2000 Fax : +27-11-392-2354
China	Mitsubishi Electric Automaiton (China) Ltd. 17/F Chong Hing Finance Center, No.288 West Nanjing Road, Shanghai 200003 China	Tel : +86-21-2322-3030 Fax : +86-21-2322-3000
Taiwan	Setsuyo Enterprise Co., Ltd. 6F., No.105 Wu-Kung 3rd.Rd, Wu-Ku Hsiang, Taipei Hsine 248, Taiwan	Tel : +886-2-2299-2499 Fax : +886-2-2299-2509
Korea	Mitsubishi Electric Automation Korea Co., Ltd. 1480-6, Gayang-dong, Gangseo-ku Seoul 157-200, Korea	Tel : +82-2-3660-9552 Fax : +82-2-3664-8372
Singapore	Mitsubishi Electric Asia Pte, Ltd. 307 Alexandra Road #05-01/02, Mitsubishi Electric Bulding Singapore 159943	Tel : +65-6470-2480 Fax : +65-6476-7439
Thailand	Mitsubishi Electric Automation (Thailand) Co., Ltd. Bang-Chan Industrial Estate No.111 Soi Serithai 54, T.Kannayao, A.Kannayao, Bangkok 10230 Thailand	Tel : +66-2-517-1326 Fax : +66-2-517-1328
Indonesia	P.T. Autoteknindo Sumber Makmur Muara Karang Selatan Block A/Utara No.1 Kav. No.11 Kawasan Industri/Pergudangan Jakarta-Utara 14440, P.O Box5045 Jakarta 11050, Indonesia	Tel : +62-21-663-0833 Fax : +62-21-663-0832
India	Messung Systems Pvt.,Ltd. Electronic Sadan NO:III Unit No15, M.I.D.C Bhosari, Pune-411026, India	Tel : +91-20-2712-3130 Fax : +91-20-2712-8108
Australia	Mitsubishi Electric Australia Pty.Ltd. 348 Victoria Road, Rydalmere, N.S.W 2116, Australia	Tel : +61-2-9684-7777 Fax : +61-2-9684-7245

MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BUILDING, 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
NAGOYA WORKS: 1-14, YADA-MINAMI 5, HIGASHI-KU, NAGOYA, JAPAN